

# **Air Quality Baseline Report for the Redeposition on Harmony Mponeng Lower Compartment Tailings Storage Facility**

Project done on behalf of **Environmental Impact Management Services**

**Report Compiled by**  
H Liebenberg-Enslin

**Report Reviewed by**  
R Bornman

**Report No:** 24EIM04 | **Version:** Final | **Date:** August 2025



## Report Details

Reference	24EIM04
Status	Final Rev 1
Report Title	Air Quality Baseline Report for the Redeposition on Harmony Mponeng Lower Compartment Tailings Storage Facility
Date	August 2025
Client	Environmental Impact Management Services Pty Ltd.
Prepared by	Hanlie Liebenberg-Enslin, PhD (University of Johannesburg)
Reviewed by	Rochelle Bornman, MPhil. GIS and Remote Sensing (University of Cambridge)
Notice	Airshed Planning Professionals (Pty) Ltd is a consulting company located in Midrand, South Africa, specialising in all aspects of air quality, ranging from nearby neighbourhood concerns to regional air pollution impacts as well as noise impact assessments. The company originated in 1990 as Environmental Management Services, which amalgamated with its sister company, Matrix Environmental Consultants, in 2003.
Declaration	Airshed is an independent consulting firm with no interest in the project other than to fulfil the contract between the client and the consultant for delivery of specialised services as stipulated in the terms of reference.
Copyright Warning	Unless otherwise noted, the copyright in all text and other matter (including the manner of presentation) is the exclusive property of Airshed Planning Professionals (Pty) Ltd. It is a criminal offence to reproduce and/or use, without written consent, any matter, technical procedure and/or technique contained in this document.

## Revision Record

Revision Number	Date	Reason for Revision
Draft	20 August 2025	Original for client comment
Final Rev0	26 August 2025	Addressed client comments
Final Rev1	27 August 2025	Addressed additional comments

## Competency Profiles

---

### **Report author: H Liebenberg-Enslin, PhD Geography (University of Johannesburg)**

After earning her master's degree in science from the University of Johannesburg (formerly RAU) in Geography and Environmental Management, Hanlie Liebenberg-Enslin began her professional career in air quality management in 2000 when she joined Environmental Management Services (EMS). She received her PhD from the University of Johannesburg in June 2014 specialising in aeolian dust transport. She is one of the founding members of Airshed Planning Professionals and served as a director of the organization until May 2013, when she assumed the role of managing director.

She has worked across Africa and has considerable experience in the many aspects of air quality management, including impact- and health risk screening assessments, dispersion modelling simulations, and emissions quantification for a variety of source types. Hanlie has been involved in a few United Nations Environmental Programme (UNEP) projects and served as the project manager on numerous innovative air quality management plan (AQMP) developments. She also participates actively in the National Association for Clean Air (NACA) and the International Union of Air Pollution Prevention and Environmental Protection Associations (IUAPPA). She served as an external examiner for various MSc and PhD dissertations and lectured at air quality management courses.

### **Report reviewer: R Bornman, (M.Phil in GIS and Remote Sensing, University of Cambridge)**

Rochelle Bornman started her professional career in Air Quality in 2008 when she joined Airshed after having worked in malaria research at the Medical Research Council in Durban. Rochelle has worked on several air quality specialist studies between 2008 and 2025. She has experience on the various components including emissions quantification for a range of source types, simulations using a range of dispersion models, impacts assessment and health risk screening assessments. Her project experience range over various countries in Africa, providing her with an inclusive knowledge base of international legislation and requirements pertaining to air quality.

## Table of Contents

---

1	Introduction.....	1
1.1	Background .....	1
1.2	Scope of Work .....	1
1.3	Pollutants of Interest.....	2
1.4	Methodology .....	2
1.4.1	Potential Air Emissions from the Project.....	3
1.4.2	Regulatory Requirements and Assessment Criteria .....	3
1.4.3	Description of the Baseline Environment.....	3
1.4.4	Existing Ambient Air Quality .....	3
2	Regulatory Requirements and Assessment Criteria .....	4
2.1	Emissions Standards.....	4
2.2	Atmospheric Emissions Reporting Regulations.....	4
2.3	Atmospheric Dispersion Modelling Regulations .....	5
2.4	National Ambient Air Quality Standards (NAAQS) .....	6
2.5	National Dust Control Regulations (NDCR).....	6
2.6	Screening criteria for animals and vegetation .....	7
3	Description of the Receiving Environment .....	8
3.1	Affected Environment .....	8
3.2	Atmospheric Dispersion Potential.....	8
3.2.1	Local Wind Field .....	8
3.2.2	Ambient Temperature .....	11
3.2.3	Atmospheric Stability .....	12
3.2.4	Precipitation and Relative Humidity .....	13
4	Status Quo of Ambient Air Quality in the Area .....	14
4.1	Existing Sources of Air Pollution.....	14
4.2	Sampled Dustfall Rates .....	14
4.3	Description of Current Operations at Savuka and Mponeng Mines .....	20
4.3.1	Ventilation shafts .....	21
4.3.2	Savuka and Mponeng Gold Plants .....	21
4.3.3	Tailings Storage Facilities .....	21
4.3.4	Marginal Ore Dumps.....	21
4.3.5	Vehicles operations .....	22
4.4	Project Activities from an Air Quality Perspective.....	22

4.5	Impact Significance Rating .....	23
5	Main Findings and Way Forward.....	25
5.1	Main Findings .....	25
5.2	Way Forward .....	25
5.2.1	Emissions Inventory.....	25
5.2.2	Atmospheric Dispersion Modelling .....	26
5.2.3	Uncertainty of Modelled Results .....	27
5.2.4	Impact Assessment Report.....	27
6	References .....	28
7	Appendix A: Specialist Curriculum Vitae .....	29
8	Appendix B – Impact Significance Rating Methodology .....	36

## List of Tables

---

Table 1: National Ambient Air Quality Standards.....	6
Table 2: Acceptable dustfall rates.....	7
Table 3: Monthly temperature summary (WRF data, January 2022 to December 2024) .....	11
Table 4: Site description and location of Savuka and Mponeng Dustfall Monitoring Units (DMU) .....	15
Table 5: Activities and associated air pollutants from the Savuka and Mponeng Operations .....	22
Table 6: Significance rating for potential air quality impacts due to the current operations .....	23
Table 7: Significance rating for potential air quality impacts due to the operational phase .....	24
Table 8: Criteria for determining impact consequence .....	36
Table 9: Probability scoring.....	37
Table 10: Determination of environmental risk .....	37
Table 11: Significance classes.....	37
Table 12: Criteria for determining prioritisation .....	38
Table 13: Determination of prioritisation factor .....	39
Table 14: Final environmental significance rating.....	39

## List of Figures

---

Figure 1: Location of sensitive receptor areas surrounding the current Savuka and Mponeng Mining Operations.....	9
Figure 2: Period, day- and night-time wind roses (WRF data, January 2022 to December 2024) .....	10
Figure 3: Seasonal wind roses (WRF data, January 2022 to December 2024).....	10
Figure 4: Monthly temperatures (WRF data, January 2022 to December 2024).....	11
Figure 5: Diurnal temperature profile (WRF data, January 2022 to December 2024) .....	12
Figure 6: Diurnal atmospheric stability (WRF data, January 2022 to December 2024).....	13
Figure 7: Savuka and Mponeng Dustfall Monitoring Units (DMU) .....	16
Figure 8: Savuka DMU Dustfall rates from January 2022 to December 2022 for Residential sites.....	17
Figure 9: Dustfall rates from January 2022 to December 2022 for Non-Residential sites .....	17
Figure 10: Dustfall rates from January 2023 to December 2023 for Residential sites.....	18
Figure 11: Dustfall rates from January 2023 to December 2023 for Non-Residential sites .....	18
Figure 12: Dustfall rates from January 2024 to December 2024 for Residential sites.....	19
Figure 13: Dustfall rates from January 2024 to December 2024 for Non-Residential sites .....	19
Figure 14: Dustfall rates from January 2025 to July 2025 for Residential sites .....	20
Figure 15: Dustfall rates from January 2025 to July 2025 for Non-Residential sites .....	20

## List of Abbreviations

---

<b>AEL</b>	Atmospheric Emissions Licence
<b>Airshed</b>	Airshed Planning Professionals (Pty) Ltd
<b>APPA</b>	Atmospheric Pollution Prevention Act
<b>CO</b>	Carbon monoxide
<b>DM</b>	District Municipality
<b>EIA</b>	Environmental Impact Assessment
<b>EIMS</b>	Environmental Impact Management Services Pty Ltd
<b>FEL</b>	Front-end-Loader
<b>GLC</b>	Ground level concentration
<b>GLCC</b>	Global Land Cover Characterisation
<b>I&amp;APs</b>	Interested and Affected Parties
<b>LM</b>	Local Municipality
<b>LOM</b>	Life of Mine
<b>MES</b>	Minimum Emission Limits
<b>MOD</b>	Marginal Ore Dump
<b>NMES</b>	National Minimum Emission Standards
<b>NAAQS</b>	National Ambient Air Quality Standards
<b>NDCR</b>	National Dust Control Regulations
<b>NEMA</b>	National Environmental Management Act
<b>NEM:AQA</b>	National Environmental Management: Air Quality Act
<b>NO</b>	Nitrogen oxide
<b>NO<sub>2</sub></b>	Nitrogen dioxide
<b>NO<sub>x</sub></b>	Oxides of nitrogen
<b>O<sub>3</sub></b>	Ozone
<b>PM</b>	Particulate matter
<b>PM<sub>10</sub></b>	Particulate matter with diameter of less than 10 µm
<b>PM<sub>2.5</sub></b>	Particulate matter with diameter of less than 2.5 µm
<b>SAAQIS</b>	South African Air Quality Information System
<b>SO<sub>2</sub></b>	Sulphur dioxide
<b>SRTM</b>	Shuttle Radar Topography Mission
<b>TSF</b>	Tailings Storage Facility
<b>US EPA</b>	United States Environmental Protection Agency
<b>WHO</b>	World health Organisation
<b>WRF</b>	Weather Research and Forecasting Model

## Units

---

<b>°C</b>	Degree Celsius
<b>km</b>	kilometre
<b>kPa</b>	kilo pascal
<b>m</b>	metres
<b>mm</b>	millimetre
<b>mg/m<sup>2</sup>/day</b>	milligram per metre squared per day
<b>t</b>	ton
<b>tpa</b>	tons per annum
<b>tpm</b>	tons per month
<b>µg/m<sup>3</sup></b>	microgram per cubic metre
<b>%</b>	percent

## Glossary

---

**Air pollution:** means any change in the composition of the air caused by smoke, soot, dust (including fly ash), cinders, solid particles of any kind, gases, fumes, aerosols and odorous substances.

**Atmospheric emission:** means any emission or entrainment process emanating from a point, non-point or mobile sources that result in air pollution.

**Averaging period:** This implies a period of time over which an average value is determined.

**Dust:** Solid materials suspended in the atmosphere in the form of small irregular particles, many of which are microscopic in size.

**Frequency of Exceedance:** A frequency (number/time) related to a limit value representing the tolerated exceedance of that limit value, i.e. if exceedances of limit value are within the tolerances, then there is still compliance with the standard.

**Particulate Matter (PM):** These comprise a mixture of organic and inorganic substances, ranging in size and shape and can be divided into coarse and fine particulate matter. The former is called Total Suspended Particulates (TSP), whilst PM<sub>10</sub> and PM<sub>2.5</sub> fall in the finer fraction referred to as Inhalable particulate matter.

**TSP:** Total suspended particulates refer to all airborne particles and may have particle sizes as large as 150 µm, depending on the ability of the air to carry such particles. Generally, suspended particles larger than 75 to 100 micrometre (µm) do not travel far and deposit close to the source of emission.

**PM<sub>10</sub>:** Thoracic particulate matter is that fraction of inhalable coarse particulate matter that can penetrate the head airways and enter the airways of the lung. PM<sub>10</sub> consists of particles with a mean aerodynamic diameter of 10 µm or smaller, and deposit efficiently along the airways. Particles larger than a mean size of 10 µm are generally not inhalable into the lungs. These PM<sub>10</sub> particles are typically found near roadways and dusty industries.

**PM<sub>2.5</sub>:** Respirable particulate fraction is that fraction of inhaled airborne particles that can penetrate beyond the terminal bronchioles into the gas-exchange region of the lungs. Also known as fine particulate matter, it consists of particles with a mean aerodynamic diameter equal to or less than 2.5 µm (PM<sub>2.5</sub>) that can be inhaled deeply into the lungs. These particles can be directly emitted from sources such as forest fires, or they can form when gases emitted from power plants, industries and automobiles react in the air.

**Point sources:** are discrete, stationary, identifiable sources of emissions that release pollutants to the atmosphere (International Finance Corporation (IFC), 2007).

**Vehicle entrainment:** This is the lifting and dropping of particles by the rolling wheels leaving the road surface exposed to strong air current in turbulent shear with the surface. The turbulent wake behind the vehicle continues to act on the road surface after the vehicle has passed.



# 1 INTRODUCTION

## 1.1 Background

Harmony Gold Mining Company Limited (Harmony) owns and operates several Gold Mines and Plants in the West Wits region in the Gauteng Province. The Mponeng and Savuka operation areas (West Wits Mining Right) are located within the West Rand District Municipality (DM) and Merafong City Local Municipality (LM), approximately 6 kilometres (km) south of Carletonville.

The Savuka Plant currently deposits tailings onto the Savuka 5a, 5b, 7a & 7b Tailings Storage Facilities (TSFs). However, these facilities are approaching their final height of 60 m, and the current planned Life of Mine (LOM) for the West Wits region exceed the available deposition capacity of these TSFs. Accordingly, the applicant is undertaking a feasibility assessment to recommence deposition on the Mponeng Lower Compartment TSF.

Airshed Planning Professionals (Pty) Ltd was appointed by Environmental Impact Management Services Pty Ltd (EIMS) to undertake an Air Quality Study as part of the proposed changes at the Mponeng Mine. Although the focus of the study is on the significance in impact changes of the Mponeng Lower Compartment Tailings Storage Facility (TSF), the Savuka Mine operations are included in the baseline to provide for a semi-cumulative<sup>1</sup> assessment.

## 1.2 Scope of Work

The scope of work for the baseline and air quality impact assessment includes the following:

- Identifying potential areas sensitive to air pollution in the project area, as well as the site dispersion potential including meteorological conditions, topography and surface characteristics (land use);
- Estimate particulate matter (PM) emissions associated with the current Mponeng operations, as well as the proposed recommencement of deposition on the Mponeng Lower Compartment TSF.
- Undertake atmospheric dispersion modelling including all the current and future sources of particulate matter (PM) emissions at Mponeng operations;
- Assess the impact of the current and future Mponeng operations on human health and biota by screening the modelling outputs (PM<sub>10</sub> and PM<sub>2.5</sub> concentrations and dustfall rates) against the National Ambient Air Quality Standards (NAAQS), National Dust Control Regulations (NDCR) and limits for biota from available literature;
- Compile an air quality specialist report; and,
- Model sources of radionuclides and radon gas (modelled as a unit release) that would contribute to the radiological impact of the Mponeng operations as input for the Radiological Impact Assessment to be undertaken by AquSim Consulting (Pty) Ltd.

---

<sup>1</sup> The semi-cumulative assessment includes the Mponeng and Savuka operations but excludes other mining operations in the region.

### 1.3 Pollutants of Interest

Airborne PM is the most significant pollutant of concern from the proposed redeposition at Mponeng Lower Compartment TSF.

The impact of particles on human health is largely dependent on: (i) particle characteristics, particularly particle size and shape, and chemical composition; and (ii) the duration, frequency and magnitude of exposure. The potential of particles to be inhaled and deposited in the lung is a function of the particle size, shape and density. Airborne particulate matter may range from relatively uniform soil particles (e.g. during dust storms) to very complex mixtures of extremely small organic and inorganic particles and liquid droplets (e.g. industrial sites). These particles could be made up of several components, including salts and acids (such as sulfates and nitrates), organic chemicals, metals and radionuclides, and soil or dust particles. The nasal openings permit large dust particles (less than few mm's) to enter the nasal region, along with much finer airborne particulates. Larger particles are deposited in the nasal region by impaction on the hairs of the nose or at the bends of the nasal passages.

Smaller particles, typically less than 10 µm, pass through the nasal region and are deposited in the tracheobronchial and pulmonary regions. Particles are removed by impacting with the wall of the bronchi when they are unable to follow the gaseous streamline flow through subsequent bifurcations of the bronchial tree. As the airflow decreases near the terminal bronchi, the smallest particles (less than 2.5 µm) are removed by Brownian motion, which pushes them to the alveolar membrane (CEPA/FPAC Working Group, 1998; Dockery & Pope, 1994).

Ambient air pollution PM can therefore be divided into three classes based on their size:

- *Inhalable coarse particulate matter* (PM<sub>10</sub>) consists of particles with a diameter between 2.5 and 10 micrometres (µm) that deposit efficiently along the airways. Particles larger than 10 µm are generally not inhaled into the lungs. These particles are typically found near roadways and dusty industries.
- *Fine particulate matter* (PM<sub>2.5</sub>) consists of particles with a diameter less than 2.5 µm and can be inhaled deeply into the lungs. These particles can be directly emitted from sources such as vegetation fires, or they can form when gases emitted from power plants, industries and automobiles react in the air.
- *Ultrafine particles* (PM<sub>1</sub>) consist of particles with a diameter smaller than 0.1 µm and have widespread deposition within the respiratory tract. These particles are typically a result of secondary chemical reactions in the atmosphere.

Air quality standards and guidelines for airborne particulates are given for various particle size fractions, including total suspended particulates (TSP), and thoracic (PM<sub>10</sub>) and respirable (PM<sub>2.5</sub>) particulates.

PM comprises a mixture of organic and inorganic substances. From gold mining and processing facilities the radioactive particles in the form of radionuclides and radon releases are of concern. These are addressed in a separate radiation study conducted by Aquisim Consulting (Pty) Ltd.

### 1.4 Methodology

The methodology followed in the assessment to quantify the air quality impacts associated with the project is discussed below. The general tasks included:

- The establishment of the baseline air quality (based on available information); and
- Preliminary qualitative assessment of the significance of the impact through the comparison of current dustfall rates with the National Dust Control Regulations (NDCR), and the potential impact from the proposed Project.

#### *1.4.1 Potential Air Emissions from the Project*

With the focus of the study on the potential impacts from the Mponeng Lower Compartment TSF where windblown dust is the main source of air pollution, particulates are the main pollutant of concern. Gaseous emissions such as sulfur dioxide (SO<sub>2</sub>), oxides of nitrogen (NO<sub>x</sub>), carbon monoxide (CO), and Total Organic Compounds (TOC) are pollutants that would result from vehicles, ventilation shafts and operational equipment, but at much lower quantities compared to PM emissions.

Airborne PM impacts are assessed based on the varying size, with PM<sub>10</sub> and PM<sub>2.5</sub> associated with health impacts, and TSP associated with nuisance caused by dust fallout (Colls, 2002).

#### *1.4.2 Regulatory Requirements and Assessment Criteria*

In the evaluation of air emissions and ambient air quality impacts reference is made to Minimum Emission Limits (MES) as part of the Listed Activities, NAAQS and the NDCR as set out in the National Environmental Management Air Quality Act (Act No. 39 of 2004) (NEMAQA). These standards apply only to common air pollutants, collectively known as criteria pollutants (SO<sub>2</sub>, NO<sub>2</sub>, CO, PM, benzene, ozone and lead).

#### *1.4.3 Description of the Baseline Environment*

An understanding of the atmospheric dispersion potential of the area is essential to an air quality impact assessment. While there is an on-site meteorological station at Mponeng, no recent data was available. Use was therefore made of modelled Weather Research and Forecasting Model (WRF) meteorological data for an on-site location for the period 1 January 2022 to 31 December 2024.

#### *1.4.4 Existing Ambient Air Quality*

No data was provided on the current ambient PM<sub>10</sub> and PM<sub>2.5</sub> concentrations. Dustfall measurements were available for January 2022 to July 2025.

## 2 REGULATORY REQUIREMENTS AND ASSESSMENT CRITERIA

Prior to assessing the impact of proposed activities on human health and the environment, reference needs to be made to the air quality regulations governing the calculation and impact of such operations i.e. reporting requirements, emission standards, ambient air quality standards and dust control regulations.

Emission standards are generally provided for point sources, specify the amount of the pollutant acceptable in an emission stream and are often based on proven efficiencies of air pollution control equipment. Air quality guidelines and standards are fundamental to effective air quality management, providing the link between the source of atmospheric emissions and the user of that air at the downstream receptor site. The ambient air quality standards and guideline values indicate safe daily exposure levels for the majority of the population, including the very young and the elderly, throughout an individual's lifetime. Air quality guidelines and standards are normally given for specific averaging or exposure periods.

This section summarises legislation for PM concentrations and dustfall rates. The National Environmental management: Air Quality Act (NEM:AQA) Section 21 Listed Activities and Minimum Emissions Standards (MES), National Atmospheric Emission Reporting Regulations, Regulations regarding Air Dispersion Modelling, NAAQS and NDCR are relevant to the project and are discussed below.

### 2.1 Emissions Standards

The NEM:AQA (Act No. 39 of 2004 as amended) mandates the Minister of Environment to publish a list of activities which result in atmospheric emissions and consequently cause significant detrimental effects on the environment, human health and social welfare, economic conditions, ecological conditions or cultural heritage. All scheduled processes as previously stipulated under the Air Pollution Prevention Act (APPA) are included as listed activities with additional activities added to the list. The updated Listed Activities and MES were published in 2013 (Government Gazette [GN] 893, No. 37054 as amended by GN 551, 12 June 2015; GN 1207, 81 October 2018; GN 687, 22 May 2019; and GN 421, 27 March 2020).

The Mponeng Gold Plant comprises of three operational carbon regeneration kilns and a smelter, which falls under listed activities Precious Metals (Sub-category 4.17: Precious and Base Metal Production and Refining). It is understood that Mponeng Gold Plant has an existing Atmospheric Emissions Licence (AEL). ***The Redeposition of tailings on Harmony Mponeng Lower Compartment Tailings Storage Facility will not result in any changes to the Gold Plant operations and hence would not require any changes to the AEL.***

### 2.2 Atmospheric Emissions Reporting Regulations

The National Atmospheric Emission Reporting Regulations (GN R283 in Government Gazette No. 38633) came into effect on 2 April 2015. The purpose of the regulations is to regulate the reporting of data and information from an identified point, non-point and mobile sources of atmospheric emissions to an internet-based National Atmospheric Emissions Inventory System (NAEIS). The NAEIS is a component of the South African Air Quality Information System (SAAQIS). Its objective is to provide all stakeholders with relevant, up to date and accurate information on South Africa's emissions profile for informed decision making.

Emission sources and data providers are classified according to groups. Mponeng mining operations would be classified under Group A ("Listed activity published in terms of section 21(1) of the Act") and is required to report emissions. Emission reports from this group must be made in the format required for NAEIS and should be in accordance with the AEL requirements.

The required information for the preceding calendar year must be submitted onto NAEIS by 31 March<sup>2</sup> of each year. Records of data submitted must be kept for a period of 5 years and must be made available for inspection by the relevant authority.

The relevant authority must request a data provider, in writing to verify the information submitted if the information is incomplete or incorrect. The data provider then has 60 days to verify the information. If the verified information is incorrect or incomplete the relevant authority must instruct a data provider, in writing, to submit supporting documentation prepared by an independent person. The relevant authority cannot be held liable for cost of the verification of data. A person guilty of an offence in terms of section 13 of these regulations is liable for penalties.

### 2.3 Atmospheric Dispersion Modelling Regulations

Air dispersion modelling provides a cost-effective means for assessing the impact of air emission sources, the major focus of which is to determine compliance with the relevant ambient air quality standards. Dispersion modelling provides a versatile means of assessing various emission options for the management of emissions from existing or proposed installations. Regulations regarding Air Dispersion Modelling were promulgated in GN 533, in Government Gazette No. 37804; 11 July 2014, and recommend a suite of dispersion models to be applied for regulatory practices as well as guidance on modelling input requirements, protocols and procedures to be followed. The Regulations regarding Air Dispersion Modelling are applicable –

- (a) in the development of an air quality management plan, as contemplated in *Chapter 3* of the NEMAQA;
- (b) in the development of a priority area air quality management plan, as contemplated in *Section 19* of the NEMAQA;
- (c) in the development of an AIR, as contemplated in *Section 30* of the NEMAQA; and,
- (d) in the development of a specialist air quality impact assessment study, as contemplated in *Chapter 5* of the NEMAQA.

Three *Levels of Assessment* are defined in the Regulations. The three levels are:

- Level 1: where worst-case air quality impacts are assessed using simpler screening models
- Level 2: for assessment of air quality impacts as part of license application or amendment processes, where impacts are the greatest within a few kilometres downwind (less than 50km)
- Level 3: require more sophisticated dispersion models (and corresponding input data, resources and model operator expertise) in situation:
  - where a detailed understanding of air quality impacts, in time and space, is required;
  - where it is important to account for causality effects, calms, non-linear plume trajectories, spatial variations in turbulent mixing, multiple source types & chemical transformations;
  - when conducting permitting and/or environmental assessment process for large industrial developments that have considerable social, economic and environmental consequences;
  - when evaluating air quality management approaches involving multi-source, multi-sector contributions from permitted and non-permitted sources in an air-shed; or,

---

<sup>2</sup> Currently the submission date is 30 June 2025 due to manual submission requirements by the DFFE.

- when assessing contaminants resulting from non-linear processes (e.g. deposition, ground-level O<sub>3</sub>, particulate formation, visibility).

The first step in the dispersion modelling exercise requires a clear objective of the modelling exercise and thereby gives clear direction to the choice of the dispersion model most suited for the purpose. Accordingly, Level 2 was deemed appropriate.

## 2.4 National Ambient Air Quality Standards (NAAQS)

Criteria pollutants are considered those pollutants most found in the atmosphere, that have proven detrimental health effects when inhaled and are regulated by ambient air quality criteria. These generally include CO, NO<sub>2</sub>, SO<sub>2</sub>, PM<sub>10</sub>, PM<sub>2.5</sub>, and ground level ozone (O<sub>3</sub>).

The initial NAAQS were published for comment in the Government Gazette on 9 June 2007. The revised NAAQS were subsequently published for comment in the Government Gazette on 13 of March 2009. The final revised NAAQS were published in the Government Gazette on 24 of December 2009 (GN 1210, Government Gazette 32816) and additional standards for particulate matter less than 2.5 µm in aerodynamic diameter (PM<sub>2.5</sub>) were published on 29 June 2012 (GN 486, Government Gazette no. 35463). SA NAAQSs for the criteria pollutants assessed in this study are listed in **Table 1**.

**Table 1: National Ambient Air Quality Standards**

Pollutant	Averaging Period	Concentration (µg/m <sup>3</sup> )	Permitted Frequency of Exceedance	Compliance Date
PM <sub>2.5</sub>	24-hour	40	4	1 January 2016 till 31 December 2029 (currently enforceable)
	24-hour	25	4	1 January 2030
	1 year	20	-	1 January 2016 till 31 December 2029 (currently enforceable)
	1 year	15	-	1 January 2030
PM <sub>10</sub>	24-hour	75	4	Currently enforceable
	1 year	40	-	Currently enforceable

## 2.5 National Dust Control Regulations (NDCR)

The NDCR were published on 1 November 2013 (GN R827 in Government Gazette No. 36974). The purpose of the regulations is to prescribe general measures for the control of dust in all areas including residential and non-residential areas. The standard for acceptable dustfall rates for residential and non-residential areas is set out in **Table 2**. According to these regulations the dustfall at the boundary or beyond the boundary of the premises where it originates cannot exceed 600 mg/m<sup>2</sup>-day in residential and light commercial areas; or 1 200 mg/m<sup>2</sup>-day in areas other than residential and light commercial areas.

In addition to the dust fall limits, the NDCR prescribe monitoring procedures and reporting requirements. This will be based on the measuring reference method ASTM 01739 averaged over 30 days.

**Table 2: Acceptable dustfall rates**

Restriction Area	Dust-fall rate (D) (mg/m <sup>2</sup> -day, 30-day average)	Permitted frequency of exceeding dust fall rate
Residential	D < 600	Two within a year, not sequential months
Non-residential	600 < D < 1 200	Two within a year, not sequential months

The regulation also specifies that the method to be used for measuring dustfall and the guideline for locating sampling points shall be American Standard Testing Method (ASTM, 1970)<sup>3</sup>, or equivalent method approved by any internationally recognised body. It is important to note that dustfall is assessed for nuisance impact and not inhalation health impact.

The currently enforceable NDCR are expected to be repealed and replaced as noted in the draft NDCR published on 25 May 2018 (Gazette No. 41650, No. 517) and more recently published on 8 March 2024 (Notice 4475 GG 50272). Under the 2024 draft NDCR, the definitions of Residential area and non-residential area have changed to:

- “Residential area” means any area where the land is used for the purposes as prescribed under schedule 2 of the Spatial Planning and Land Use Management Act, 2013 (Act No. 16 of 2013), excluding the land that is scheduled for agriculture, industrial and mining purposes.
- “Non-residential area” means any area that’s its land is scheduled for agriculture, industrial and mining purposes as prescribed under schedule 2 of the Spatial Planning and Land Use Management Act, 2013 (Act No. 16 of 2013).

## **2.6 Screening criteria for animals and vegetation**

Limited information is available on the impact of dust on vegetation and grazing quality. While there is little direct evidence of the impact of dustfall on vegetation in the South African context, a review of European studies has shown the potential for reduced growth and photosynthetic activity in sunflower and cotton plants exposed to dust fall rates greater than 400 mg/m<sup>2</sup>- day (Farmer, 1993). In addition, there is anecdotal evidence to indicate that over extended periods, high dustfall levels in grazing lands can soil vegetation and this can impact the teeth of livestock (Farmer, 1993).

---

<sup>3</sup> ASTM 1739:70 is a previous version of ASTM 1739 which did not prescribe a wind shield around the opening of the bucket; the addition of a wind shield is intended to deflect wind away from the lip of the container, allowing for a more laminar flow across the top of the collecting container (Kornelius *et al.*, 2015). SANS 1929-2004 does however refer to ASTM 1739-98 (ASTM, 1998), which has a wind shield.

### 3 DESCRIPTION OF THE RECEIVING ENVIRONMENT

#### 3.1 Affected Environment

Savuka and Mponeng current surface operations cover an area of 62 square kilometres (km<sup>2</sup>) and is located approximately 6 km south of Carletonville (**Figure 1**). Other neighbouring towns include Fochville and Potchefstroom, situated 12 km and 50 km respectively to the south and west of the Mponeng operations (see **Figure 1**).

The land use in the area comprises primarily of mining and agriculture. The topography is characterised by undulating hills ranging from 1 500 to 1 700 metres above mean sea level (mamsl).

#### 3.2 Atmospheric Dispersion Potential

In the assessment of the possible impacts from air pollutants on the surrounding environment and human health, a good understanding of the regional climate and local air dispersion potential of a site is essential. Meteorological characteristics of a site govern the dispersion, transformation, and eventual removal of pollutants from the atmosphere (Pasquill and Smith, 1983; Godish, 1990). The extent to which pollution will accumulate or disperse in the atmosphere is dependent on the degree of thermal and mechanical turbulence within the earth's boundary layer.

Dispersion comprises vertical and horizontal components of motion. The vertical component is defined by the stability of the atmosphere and the depth of the surface mixing layer. The horizontal dispersion of pollution in the boundary layer is primarily a function of the wind field. The wind speed determines both the distance of downwind transport and the rate of dilution as a result of plume 'stretching'. The generation of mechanical turbulence is similarly a function of the wind speed, in combination with the surface roughness.

The wind direction and the variability in wind direction, determine the general path pollutants will follow, and the extent of crosswind spreading (Shaw and Munn, 1971; Pasquill and Smith, 1983; Oke, 1990).


Pollution concentration levels fluctuate in response to changes in atmospheric stability, to concurrent variations in the mixing depth, and to shifts in the wind field. Spatial variations, and diurnal and seasonal changes, in the wind field and stability regime are functions of atmospheric processes operating at various temporal and spatial scales (Goldreich and Tyson, 1988). Atmospheric processes at macro- and meso-scales need therefore be considered to accurately parameterise the atmospheric dispersion potential of a particular area.

Use was made of three years (2022 – 2024) of simulated WRF hourly sequential data, for a location at Savuka and Mponeng mines. This data was used to construct wind roses, general climatic information such as diurnal temperature variations, atmospheric stability estimates and for dispersion modelling.

##### 3.2.1 Local Wind Field


The wind roses comprise 16 spokes, which represent the directions from which winds blew during a specific period. The colours used in the wind roses below, reflect the different categories of wind speeds; the yellow area, for example, representing winds between 5 and 7 m/s. The dotted circles provide information regarding the frequency of occurrence of wind speed and direction categories. The frequency with which calms occurred, i.e. periods during which the wind speed was below 1 m/s are also indicated.



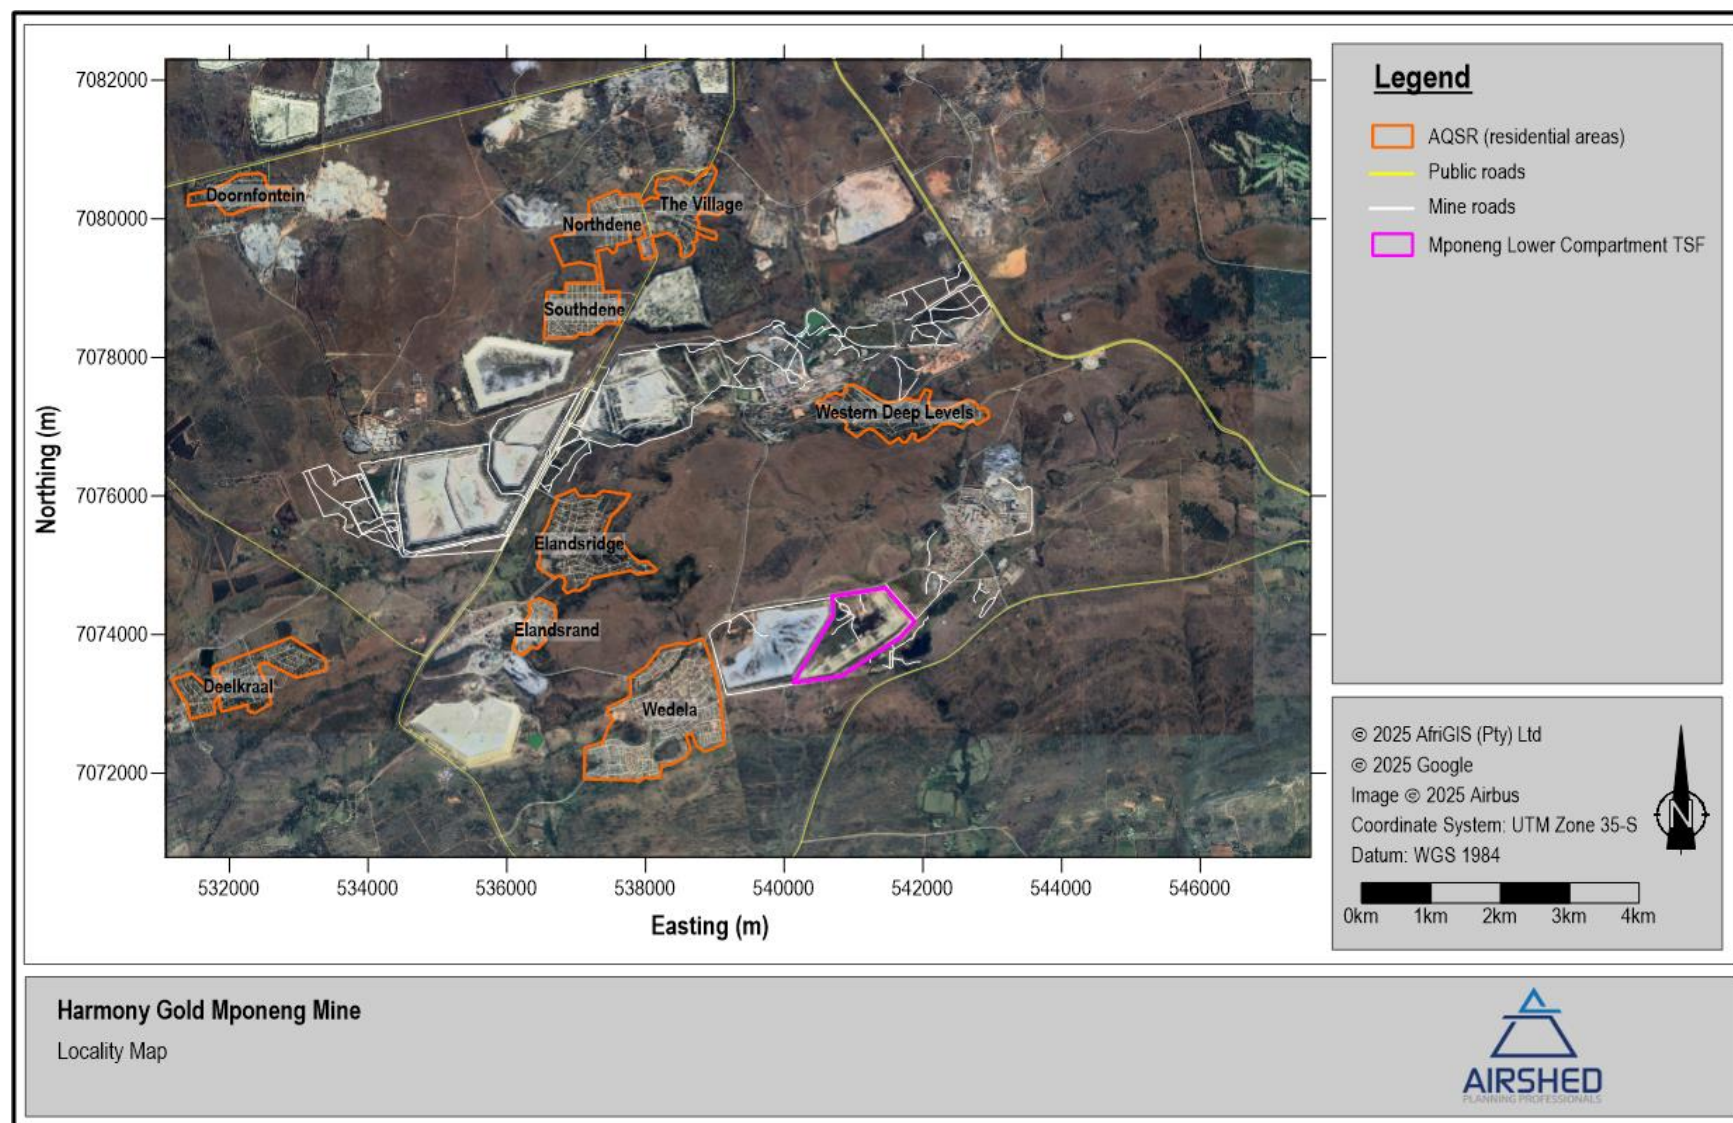


**Figure 1: Location of sensitive receptor areas surrounding the current Savuka and Mponeng Mining Operations**

The period wind field and diurnal variability in the wind field are shown in **Figure 2**, while the seasonal variations are shown in **Figure 3**. The wind field is dominated by winds from the northerly sector. The strongest winds (>6 m/s) occurred mostly from the north-northeasterly sector. Calm conditions occurred 3.5% of the time, with the average wind speed over the period of 3.63 m/s. Both daytime and night-time show dominant northerly wind fields, with calm conditions 4.4% during the day, and 2.52% during the night.

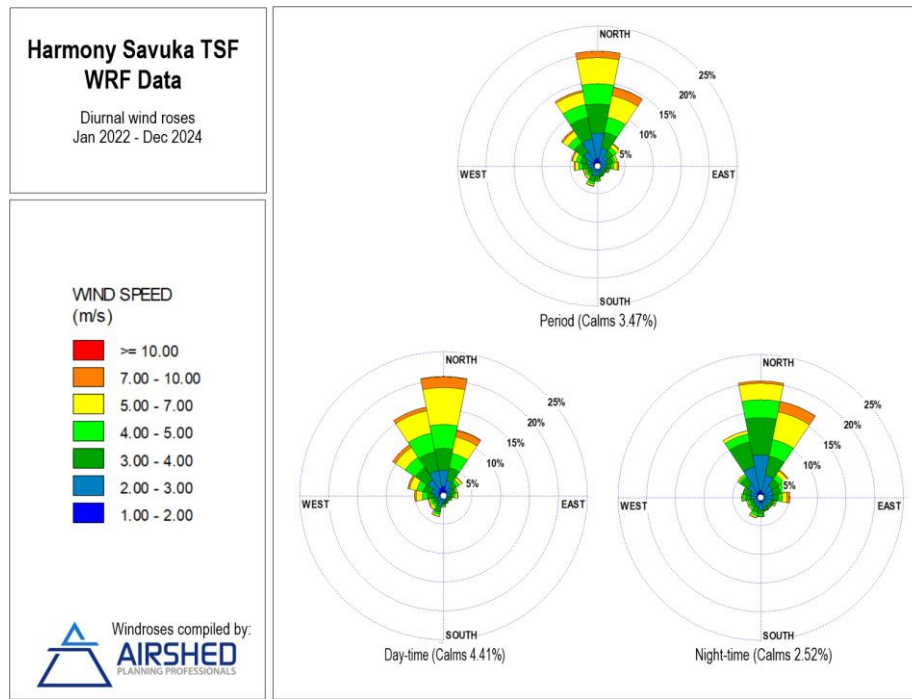

**Figure 2: Period, day- and night-time wind roses (WRF data, January 2022 to December 2024)**

The dominant northerly winds prevail throughout the seasons, with an increase in wind speeds during the spring months **Figure 3**.

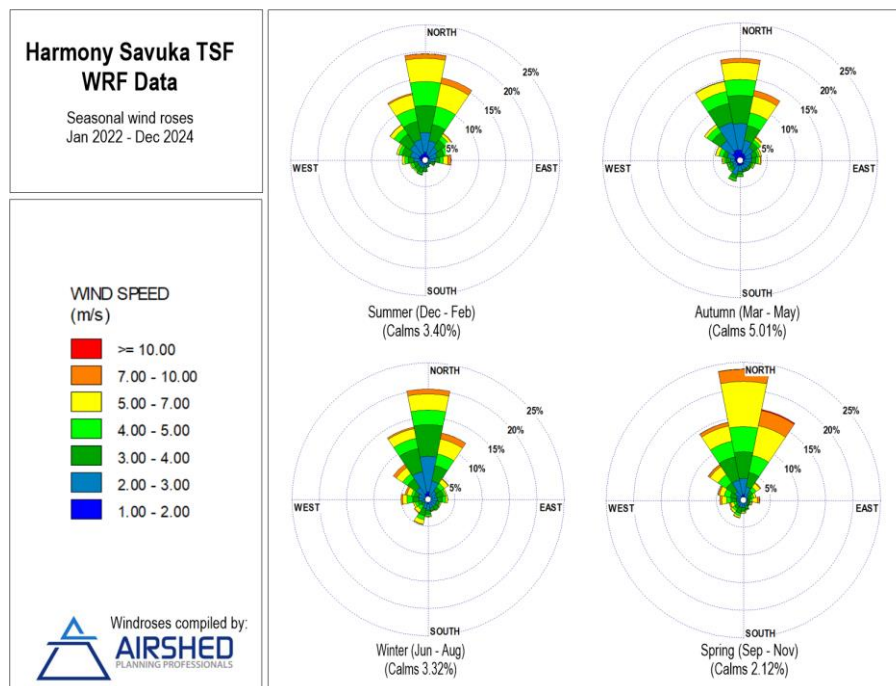

**Figure 3: Seasonal wind roses (WRF data, January 2022 to December 2024)**


### 3.2.2 Ambient Temperature

Air temperature is important, both for determining the effect of plume buoyancy (the larger the temperature difference between the emissions plume and the ambient air, the higher the plume can rise), and determining the development of the mixing and inversion layers.


Monthly mean, maximum and minimum temperatures are given in **Table 3** and **Figure 4**. Diurnal temperature variability is presented in **Figure 5**. Temperatures ranged between -2°C and 35°C. The highest temperature occurred in January and the lowest in July. During the day, temperatures increase to reach maximum at around 14:00 in the afternoon. Ambient air temperature decreases to reach a minimum at around 06:00 i.e. just before sunrise.

**Table 3: Monthly temperature summary (WRF data, January 2022 to December 2024)**

Minimum, Average and Maximum Temperatures (°C)												
	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec
Monthly Average	23	23	22	18	16	12	12	15	19	21	22	24
Hourly Maximum	33	35	33	29	27	23	23	28	30	33	34	34
Hourly Minimum	11	14	13	8	5	1	-2	1	4	3	7	13

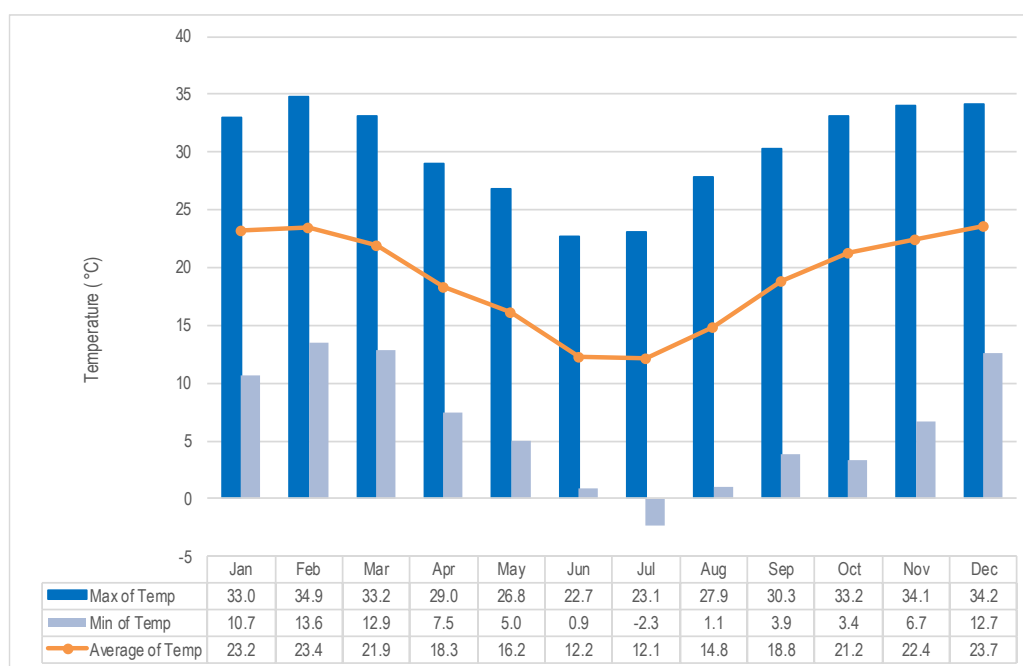

**Figure 4: Monthly temperatures (WRF data, January 2022 to December 2024)**

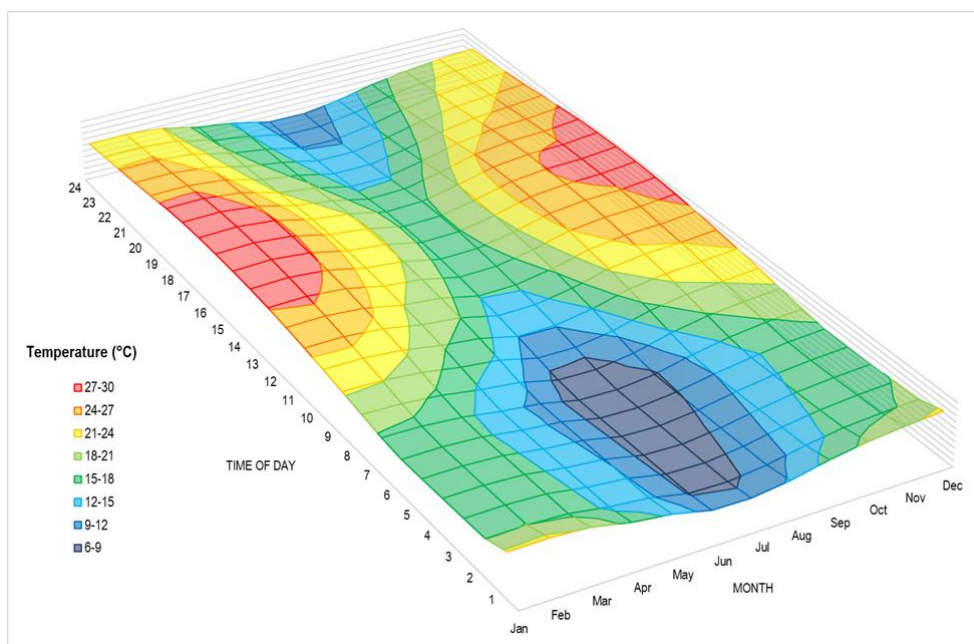

**Figure 5: Diurnal temperature profile (WRF data, January 2022 to December 2024)**


### 3.2.3 Atmospheric Stability

The new generation air dispersion models differ from the models traditionally used in a number of aspects, the most important of which are the description of atmospheric stability as a continuum rather than discrete classes. The atmospheric boundary layer properties are therefore described by two parameters; the boundary layer depth and the Obukhov length (often referred to as the Monin-Obukhov length).

The Obukhov length ( $L_{Mo}$ ) provides a measure of the importance of buoyancy generated by the heating of the ground and mechanical mixing generated by the frictional effect of the earth's surface. Physically, it can be thought of as representing the depth of the boundary layer within which mechanical mixing is the dominant form of turbulence generation (CERC, 2004). The atmospheric boundary layer constitutes the first few hundred metres of the atmosphere. During daytime, the atmospheric boundary layer is characterised by thermal turbulence due to the heating of the earth's surface. Night-times are characterised by weak vertical mixing and the predominance of a stable layer. These conditions are normally associated with low wind speeds and lower dilution potential.

Diurnal variation in atmospheric stability, as calculated from measured data, and described by the inverse Obukhov length and the boundary layer depth is provided in **Figure 6**. The highest concentrations for ground level, or near-ground level releases from non-wind dependent sources would occur during weak wind speeds and stable (night-time) atmospheric conditions. For elevated releases, unstable conditions can result in very high concentrations of poorly diluted emissions close to the stack. This is called *looping* (Figure 6(c)) and occurs mostly during daytime hours. Neutral conditions disperse the plume fairly equally in both the vertical and horizontal planes and the plume shape is referred to as *coning* (Figure 6(b)). Stable conditions prevent the plume from mixing vertically, although it can still spread horizontally and is called *fanning* (Figure 6(a)) (Tiway & Colls, 2010). For ground level releases such as fugitive dust the highest ground level concentrations will occur during stable night-time conditions.



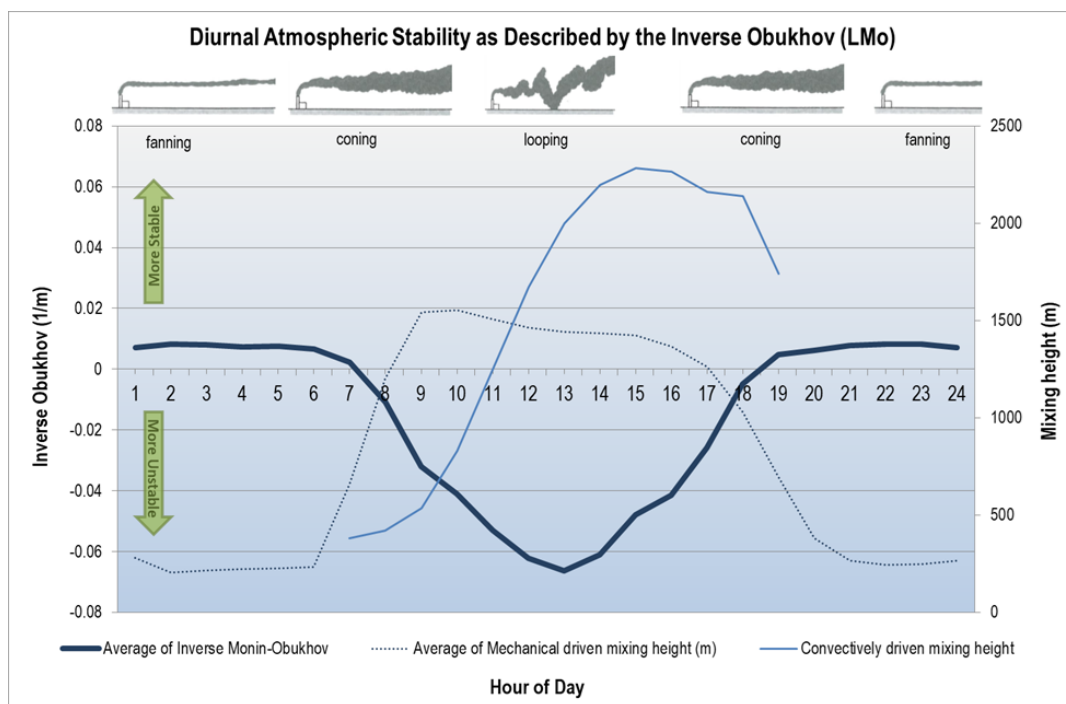

**Figure 6: Diurnal atmospheric stability (WRF data, January 2022 to December 2024)**

### 3.2.4 Precipitation and Relative Humidity

Rainfall is important to air pollution studies since it represents an effective removal mechanism of atmospheric pollutants. Monthly rainfall obtained from the on-site data did not appear to be accurate. Rainfall in this area occurs mostly during the summer months although it also rains during spring and autumn while the winter months are dry even though the relative humidity is greater during the winter period than other seasons. Colder air can hold less moisture than warmer air and thus the percentage saturation is higher at a lower moisture quantity resulting in higher relative humidity during colder periods than warmer periods.

## 4 STATUS QUO OF AMBIENT AIR QUALITY IN THE AREA

### 4.1 Existing Sources of Air Pollution

The current air quality in the study area is mostly influenced by mining, deposition and reclamation activities at Savuka and Mponeng and other companies' mining operations, as well as farming activities, domestic fires, vehicle exhaust emissions and dust entrained by vehicles. These emission sources vary from activities that generate relatively coarse airborne particulates (such as farmland preparation, dust from paved and unpaved roads, and the mine sites) to fine PM such as that emitted by vehicle exhausts, diesel power generators and processing operations.

Domestic households are known to have the potential to be one of the most significant sources that contribute to poor air quality within residential areas. Individual households are low volume emitters, but their cumulative impact is significant. It is likely that households within the local communities or settlements utilize coal, paraffin and/or wood for cooking and/or space heating (mainly during winter) purposes. Pollutants arising from the combustion of wood include respirable particulates, CO and SO<sub>2</sub> with trace amounts of polycyclic aromatic hydrocarbons (PAHs), in particular benzo(a)pyrene and formaldehyde. Particulate emissions from wood burning have been found to contain about 50% elemental carbon and about 50% condensed hydrocarbons.

Biomass burning includes the burning of evergreen and deciduous forests, woodlands, grasslands, and agricultural lands. Within the project vicinity, crop-residue burning and wildfires (locally known as veld fires) may represent significant sources of combustion-related emissions. The frequency of wildfires in the grasslands varies between annual and triennial. Biomass burning is an incomplete combustion process (Cachier, 1992), with carbon monoxide, methane and nitrogen dioxide gases being emitted. Approximately 40% of the nitrogen in biomass is emitted as nitrogen, 10% is left in the ashes, and it may be assumed that 20% of the nitrogen is emitted as higher molecular weight nitrogen compounds (Held, et al., 1996). The visibility of the smoke plumes is attributed to the aerosol (particulate matter) content.

Emissions from unpaved roads constitute a major source of emissions to the atmosphere in the South African context. When a vehicle travels on an unpaved road the force of the wheels on the road surface causes pulverization of surface material. Particles are lifted and dropped from the rolling wheels, and the road surface is exposed to strong turbulent air shear with the surface. The turbulent wake behind the vehicle continues to act on the road surface after the vehicle has passed. Dust emissions from unpaved roads vary in relation to the vehicle traffic and the silt loading on the roads. Unpaved roads in the region are mainly haul and access roads. Emissions from paved roads are significantly less than those originating from unpaved roads, however they do contribute to the particulate load of the atmosphere. Particulate emissions occur whenever vehicles travel over a paved surface. The fugitive dust emissions are due to the re-suspension of loose material on the road surface. Paved roads in the region include the N12 to the south, the R501 to the north and R500 to the east.

### 4.2 Sampled Dustfall Rates

Dust fallout sampling has been undertaken around the Savuka and Mponeng operations since April 2004<sup>4</sup> and includes a network comprising of 15 single Dustfall Monitoring Units (DMU) in accordance with ASTM D1739 (1970) (**Figure 7**). Eleven (11) of these DMUs fall within the Savuka operations and four (4) within the Mponeng operations, of which two (2) DMUs are screened against the NDCR non-residential limit of 1 200 mg/m<sup>2</sup>/day, with the remaining units all regarded as residential (screened against the NDCR residential limit of 600 mg/m<sup>2</sup>/day). These are listed in **Table 4**.

---

<sup>4</sup> Previously owned by Anglo Gold Ashanti and referred to as the West Wits operations.


**Table 4: Site description and location of Savuka and Mponeng Dustfall Monitoring Units (DMU)**

Mine	DMU	Location		Classification	Status 2025
		Longitude	Latitude		
Savuka	Lesley Williams Private Hospital	27.42453	-26.4023	Residential	Active
	AngloGold Hospital	27.39908	-26.429	Residential	Decommissioned July 2023
	Elandsrand Fire Station (Golf)	27.36553	-26.4461	Residential	Decommissioned June 2023 <sup>(a)</sup>
	Harmony Hostel	27.36236	-26.4561	Residential	Active
	Southdene Village	27.37578	-26.4127	Residential	Active
	Engineering Training Centre	27.39694	-26.4183	Residential	Active
	Envirogreen Sewage Plant	27.34556	-26.4279	Residential	Decommissioned Dec 2024 <sup>(b)</sup>
	East of Old North	27.40347	-26.4159	Non-residential	Active
	East of Savuka	27.36897	-26.4365	Residential	Active
	South of Savuka	27.35306	-26.4521	Residential	Active
	West Deep Area (Skomplaas)	27.3971	-26.4258	Residential	Active
	Blyvoor Plant North	27.34638	-26.4213	Residential	Active
Mponeng	Wedela Recreation Centre	27.39183	-26.4611	Residential	Active
	Mponeng Gold Plant	27.43503	-26.4393	Non-residential	Active
	NE Mponeng TSF	27.42356	-26.4456	Residential	Active
	SSW Mponeng TSF	27.39267	-26.4656	Residential	Active
	Village Substation	27.40182	-26.4466	Residential	Active

Notes: <sup>(a)</sup> Relocated to Village Substation  
<sup>(a)</sup> Relocated to Blyvoor Plant North

Dustfall rates for the Savuka and Mponeng DMUs for the period January 2023 to July 2025 were made available for inclusion into this report and shown in **Figures 8 and 9** for 2022, **Figures 10 and 11** for 2023, **Figures 12 and 13** for 2024, and **Figures 14 and 15** for 2025.

During the three and half years (January 2022 – July 2025) for both the residential and non-residential locations the dustfall rates were below the respective NDCRs with no exceedances recorded.

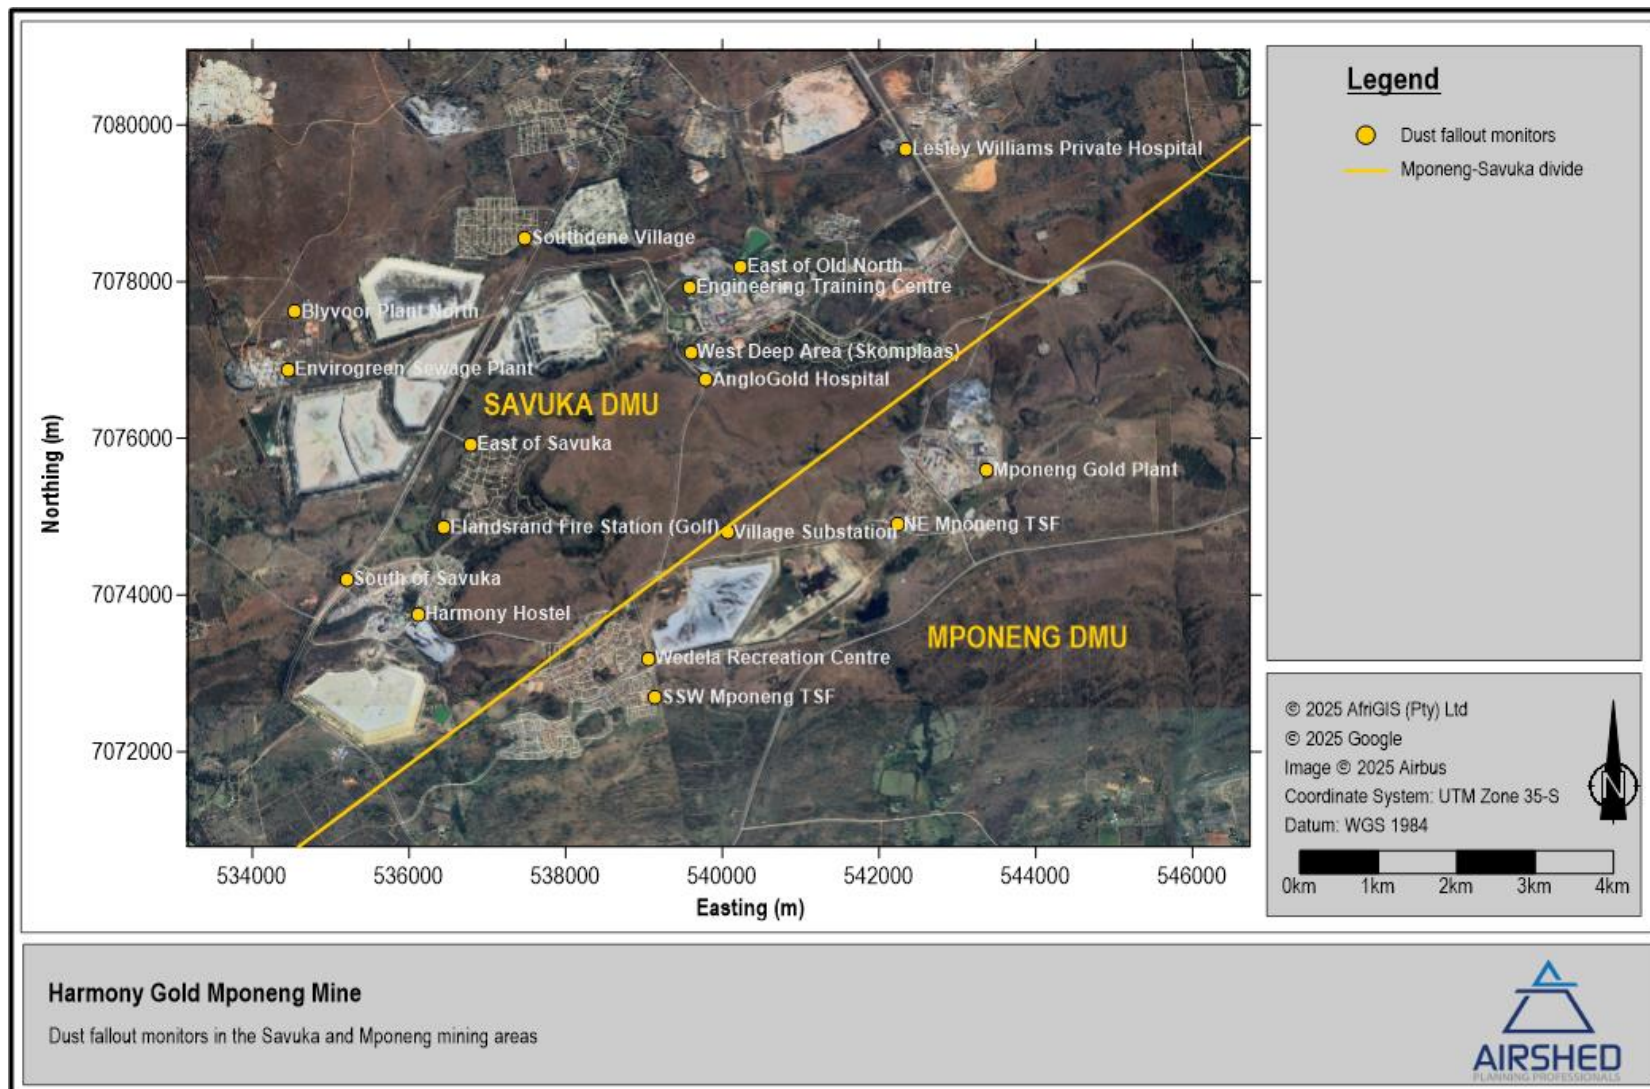

**Figure 7: Savuka and Mponeng Dustfall Monitoring Units (DMU)**



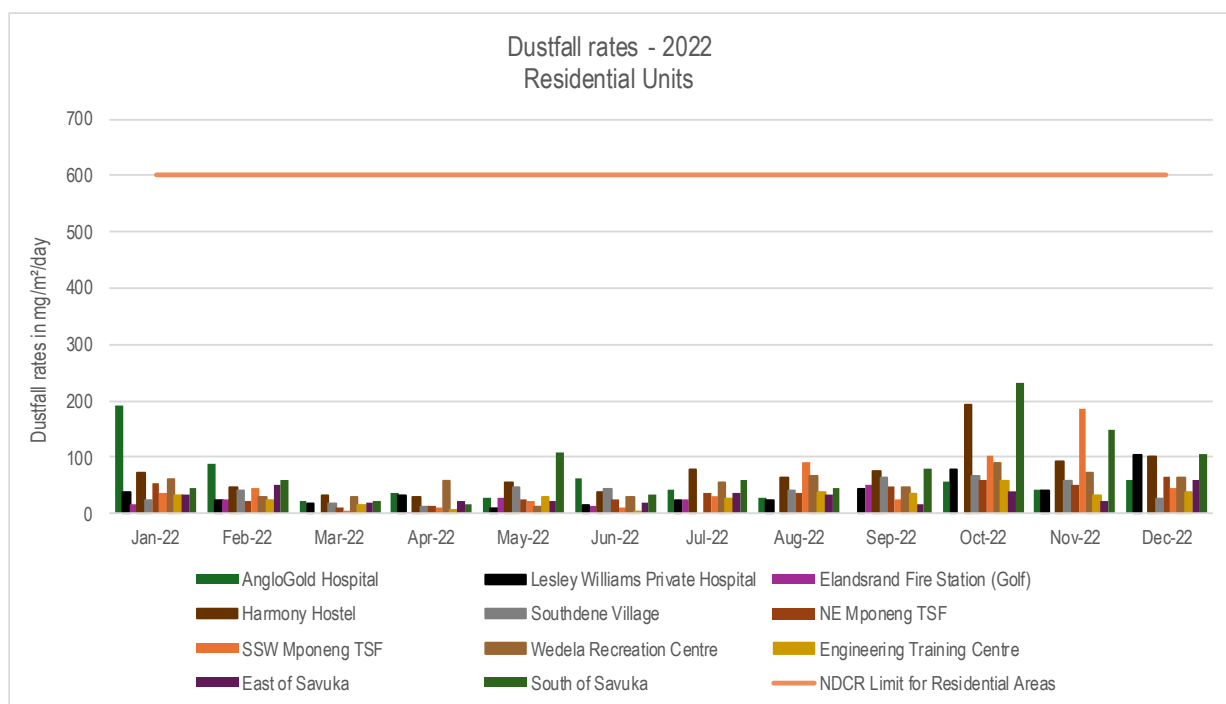


Figure 8: Savuka DMU Dustfall rates from January 2022 to December 2022 for Residential sites

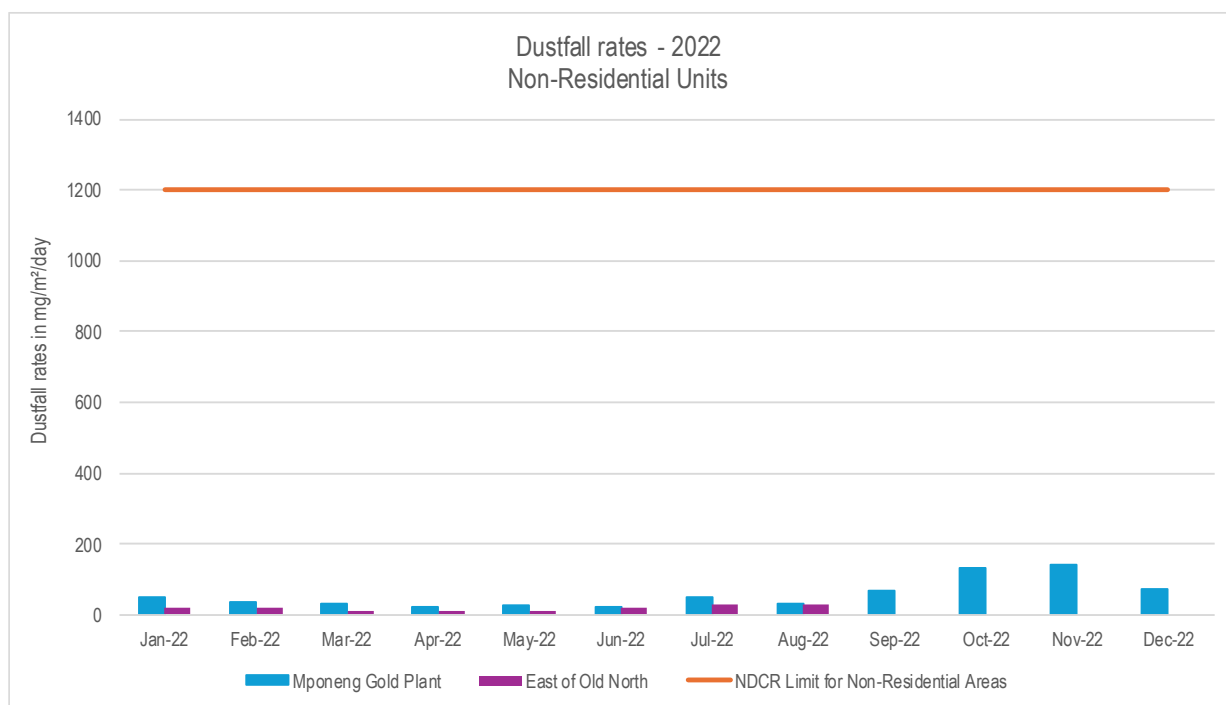


Figure 9: Dustfall rates from January 2022 to December 2022 for Non-Residential sites

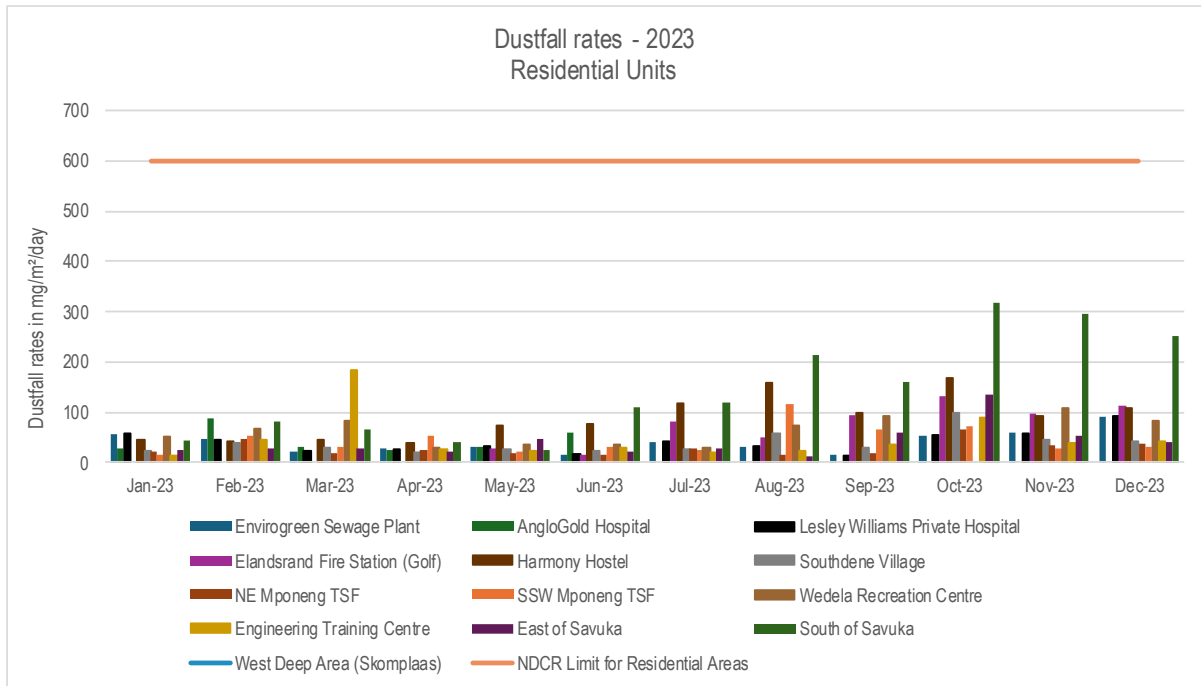


Figure 10: Dustfall rates from January 2023 to December 2023 for Residential sites

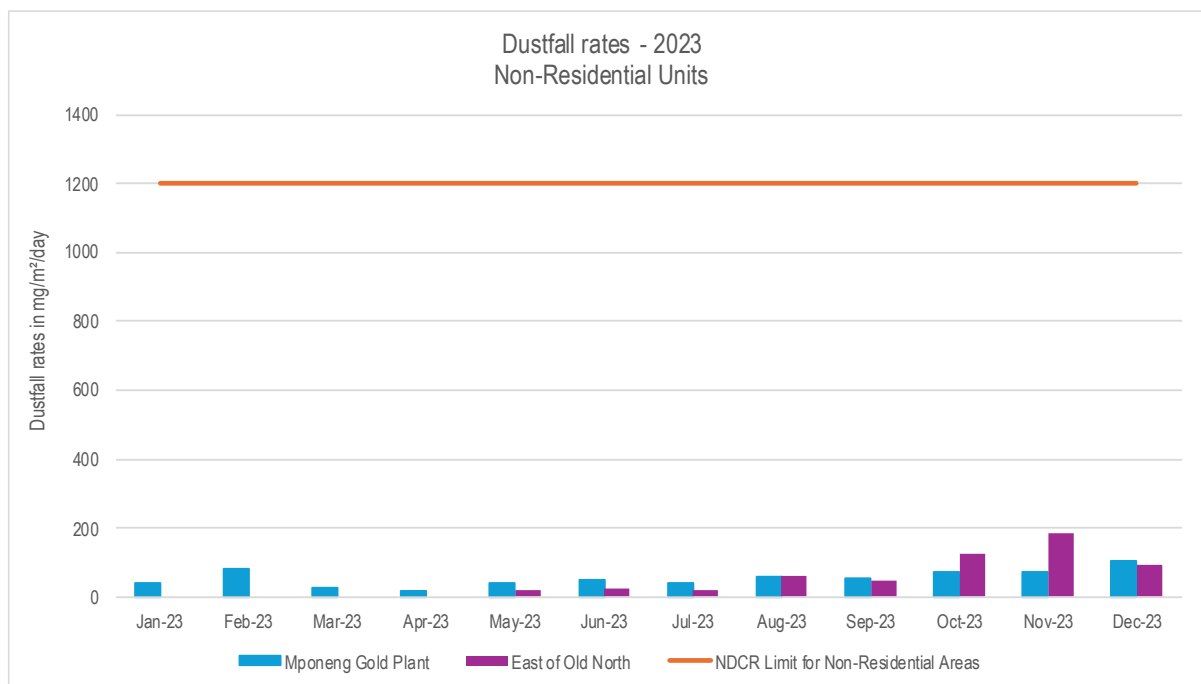


Figure 11: Dustfall rates from January 2023 to December 2023 for Non-Residential sites

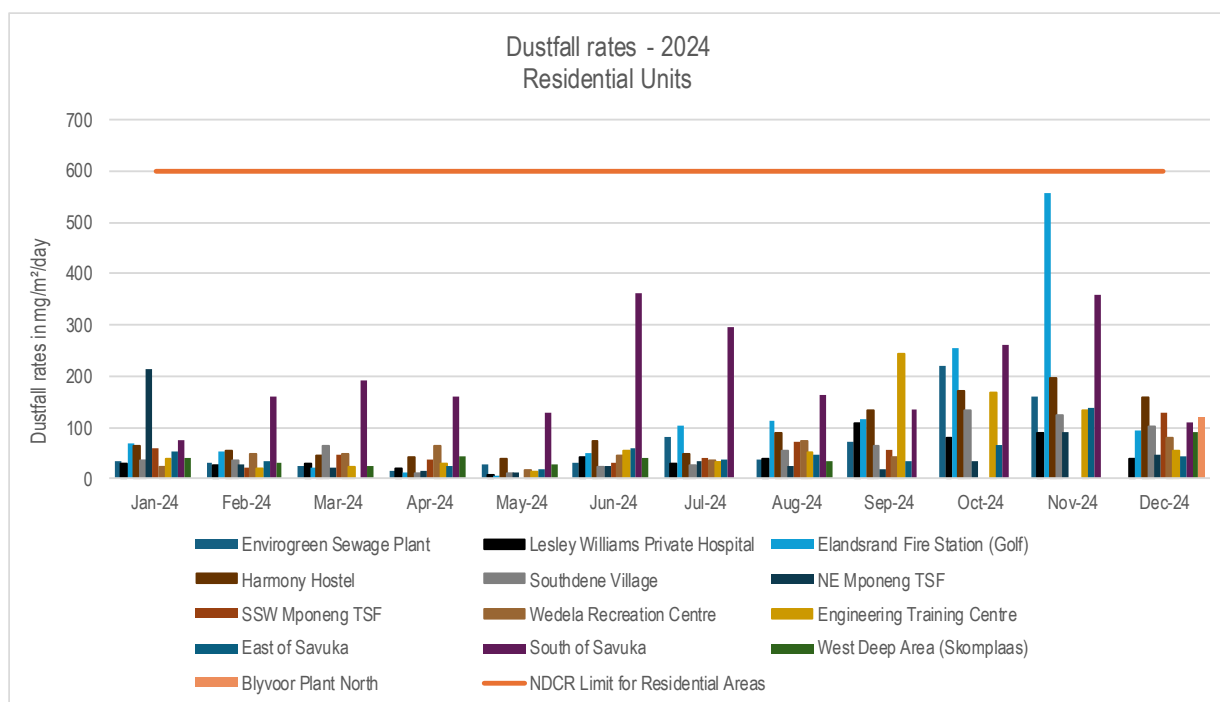


Figure 12: Dustfall rates from January 2024 to December 2024 for Residential sites

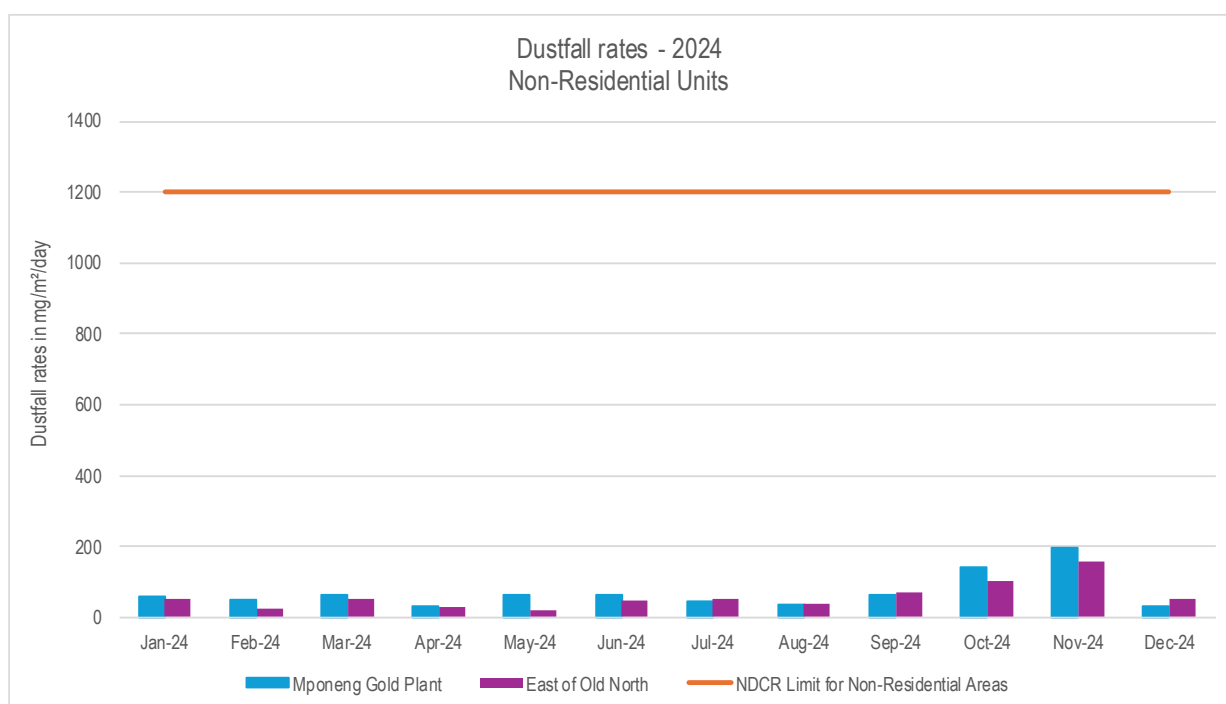


Figure 13: Dustfall rates from January 2024 to December 2024 for Non-Residential sites

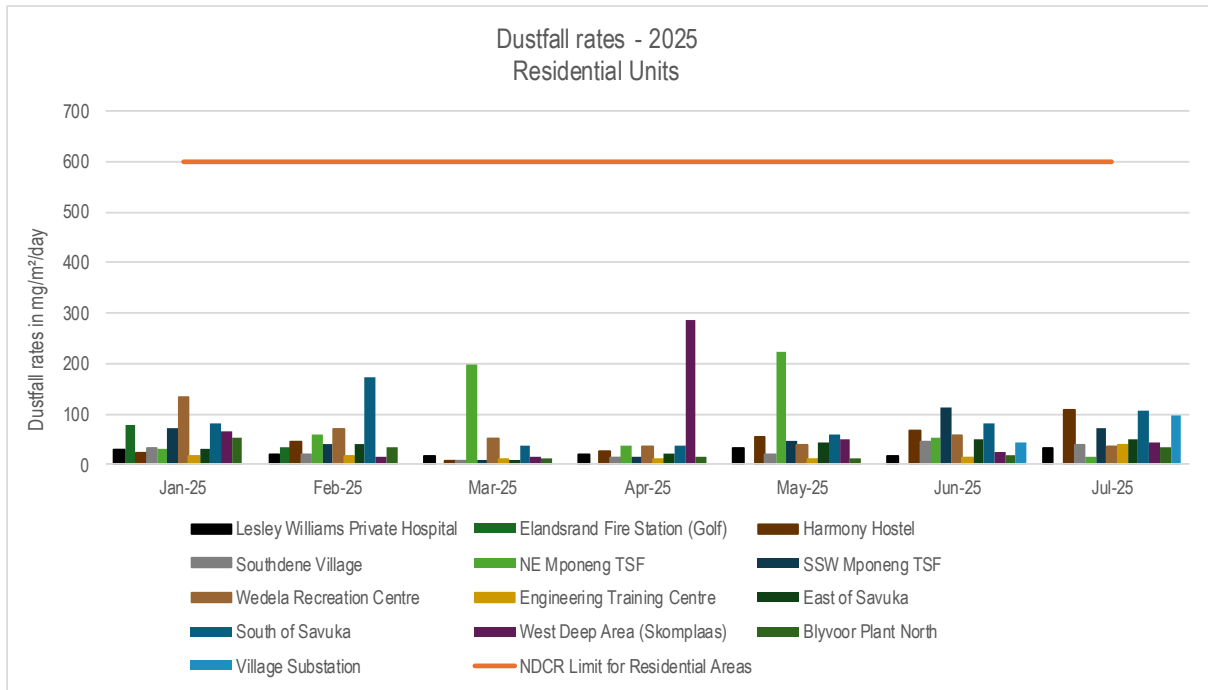


Figure 14: Dustfall rates from January 2025 to July 2025 for Residential sites

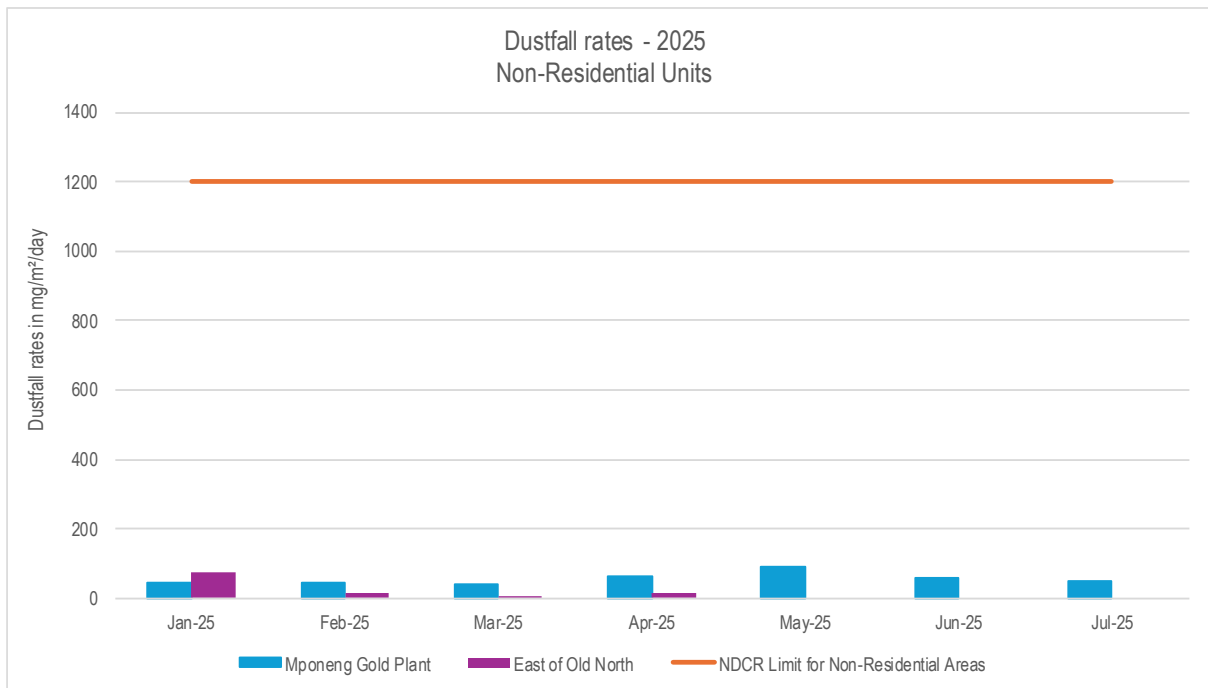


Figure 15: Dustfall rates from January 2025 to July 2025 for Non-Residential sites

#### 4.3 Description of Current Operations at Savuka and Mponeng Mines

The current operations include ventilation shaft emissions (underground operations), bulldozing, material transfer (loading and off-loading), wheel entrainment from vehicles, wind erosion from marginal ore dumps (MOD) and TSFs, and activities at the processing plant.

#### 4.3.1 Ventilation shafts

Typical operations associated with underground mining include sub-surface drilling and blasting, sub-surface transferring ore and waste rock to surface with conveyors, material transfer points, stockpiling, and mobile equipment operations. There is one operational shaft at Savuka Mine and one at Mponeng Mine.

#### 4.3.2 Savuka and Mponeng Gold Plants

The only operational plant is the Mponeng Gold Plant, with only material handling, crushing and screening at the Savuka Gold Plant. The Mponeng Gold Plant comprises of three operational carbon regeneration kilns and a smelter. While the carbon regeneration kilns do not have any associated abatement equipment/control technology; the smelter off-gas is routed through a baghouse before being vented to the atmosphere.

#### 4.3.3 Tailings Storage Facilities

There are several active and dormant TSFs, with the focus of the study on the redeposition at Mponeng Lower Compartment TSF. Tailings material is reclaimed from the dormant TSFs and loaded into trucks and transported by unpaved road to the Mponeng Gold Plant. The Savuka (5 and 7) TSFs and Mponeng TSF are in use as residue deposition sites. All these TSFs are subject to wind erosion.

Wind erosion is a complex process, including three different phases of particle entrainment, transport and deposition. It is primarily influenced by atmospheric conditions (e.g. wind, precipitation and temperature), soil properties (e.g. soil texture, composition and aggregation), land-surface characteristics (e.g. topography, moisture, aerodynamic roughness length, vegetation and non-erodible elements) and land-use practice (e.g. farming, grazing and mining) (Shao, 2008).

Windblown dust generates from natural and anthropogenic sources. For wind erosion to occur, the wind speed needs to exceed a certain threshold, called the friction velocity. This relates to gravity and the inter-particle cohesion that resists removal. Surface properties such as soil texture, soil moisture and vegetation cover influence the removal potential. Conversely, the friction velocity or wind shear at the surface is related to atmospheric flow conditions and surface aerodynamic properties. Thus, for particles to become airborne the wind shear at the surface must exceed the gravitational and cohesive forces acting upon them, called the threshold friction velocity (Shao, 2008).

The US EPA indicates a friction velocity of 5.4 m/s to initiate erosion from coal storage piles (US EPA, 2006). Liebenberg-Enslin (2014) estimated a wind erosion threshold of 8.8 m/s for gold tailings, and Mian & Yanful (2003) calculated a wind speed more than 9 m/s is required to initiate wind erosion from two tailings storage facilities in New Brunswick and Ontario, Canada. Thus, the likelihood exists for wind erosion to occur from open and exposed surfaces, with loose fine material, when the wind speed exceeds at least 5.4 m/s.

As indicated, any binding properties would reduce the potential for wind erosion. One of the most effective measures of minimizing wind erosion emissions from tailings storage facilities is re-vegetation. The control efficiency of vegetation is given as 40% for non-sustaining vegetation and 90% for re-vegetation. Secondary rehabilitation would up the control efficiency to 60% for non-sustaining vegetation (NPI, 2012). The current active TSFs and proposed TSF would not be covered and therefore pose the largest risk for wind-blown dust

#### 4.3.4 Marginal Ore Dumps

The Savuka and Mponeng Marginal Ore Dumps (MOD) are being reclaimed. The recovery of a MOD involves bulldozing the rock from the top of the dump in successive layers. At the bottom of the slope the rock is loaded into trucks and transported

by unpaved road to the Mponeng Gold Plant. The MODs are far less susceptible to wind erosion than the TSFs due to the material properties (mostly due to the size of the particles).

#### 4.3.5 Vehicles operations

Trucks transport the tailings and MOD material by unpaved road to the Mponeng Gold Plant. The operation of the trucks would result in both entrainment of dust along the unpaved roads and exhaust emissions. It has been found that of these two particulate matter sources associated with the truck operations the entrainment of dust as the trucks travel along the unpaved roads is far more significant than exhaust emissions and is often one of the most significant sources of elevated ground-level fine particulate matter concentrations and dustfall rates at and around mining operations.

### 4.4 Project Activities from an Air Quality Perspective

The proposed activities will result in emissions to air from a variety of activities and sources. The only source of air emissions due to the Project is wind erosion due to the re-instatement of the Mponeng Lower TSF as a tailings deposit area, where it is currently used as a holdings dam and Landfill facility. Slurry and return water pipes will have to be constructed between the Savuka Plant and the Mponeng TSF. The main air pollution activities are listed in **Table 5**.

**Table 5: Activities and associated air pollutants from the Savuka and Mponeng Operations**

Activity	Associated pollutants
<b>CURRENT OPERATIONS</b>	
<b>Underground Mining (emissions released via vent shafts)</b>	
Drilling and blasting	particulate matter (PM) <sup>(a)(c)</sup> , sulfur dioxide (SO <sub>2</sub> ); oxides of nitrogen (NO <sub>x</sub> ); carbon monoxide (CO); Total Organic Compounds (TOC) and carbon dioxide (CO <sub>2</sub> ) <sup>(b)</sup>
Loading and tipping of ore and waste	mostly PM, gaseous emissions from mining equipment (Diesel Particulate Matter [DPM], SO <sub>2</sub> ; NO <sub>x</sub> ; CO; CO <sub>2</sub> )
Primary crusher (assumed to be underground)	mostly PM, gaseous emissions from machinery (PM, SO <sub>2</sub> ; NO <sub>x</sub> ; CO; CO <sub>2</sub> )
Materials handling (loading of ore and waste)	mostly PM, gaseous emissions from Front-end-Loaders (FELs) (PM, SO <sub>2</sub> ; NO <sub>x</sub> ; CO; CO <sub>2</sub> )
<b>Surface Operations</b>	
Secondary & tertiary crushing and screening	mostly PM <sup>(c)</sup> , gaseous emissions from machinery (PM, SO <sub>2</sub> ; NO <sub>x</sub> ; CO; CO <sub>2</sub> )
Materials handling (loading & off-loading)	mostly PM <sup>(c)</sup> and windblown dust from storage piles
Trucks transporting ore and waste	PM from vehicle entrainment on unpaved road sections and gaseous emissions from truck exhaust (PM, SO <sub>2</sub> ; NO <sub>x</sub> ; CO; CO <sub>2</sub> )
Tailings Storage Facilities (TSFs)	PM <sup>(c)</sup> from windblown dust and radon
Marginal Ore Dumps (MOD)	PM <sup>(c)</sup> from windblown dust and radon
Processing plant stacks	PM <sup>(c)</sup> , SO <sub>2</sub> ; NO <sub>x</sub> ; CO; CO <sub>2</sub>
<b>PROPOSED OPERATIONS</b>	
Mponeng Lower Compartment TSFs	PM <sup>(c)</sup> from windblown dust and radon

Notes: <sup>(a)</sup> Particulate matter (PM) refers to Total Suspended Particulates (TSP), PM<sub>10</sub> and PM<sub>2.5</sub> (see Section 1.3.1).

<sup>(b)</sup> CO<sub>2</sub> and methane are greenhouse gasses (GHG).

<sup>(c)</sup> Radionuclides associated with PM emissions

## 4.5 Impact Significance Rating

The significance of environmental air quality impacts due to the proposed project was assessed according to the methodology adopted by EIMS (**Appendix B**).

**Table 6: Significance rating for potential air quality impacts due to the current operations**

Impact Name	Air quality impacts due to current operations at Mponeng Mine				
Alternative	NA				
Phase	Operational Current				
Environmental Risk					
Attribute	Pre-mitigation	Post-mitigation	Attribute	Pre-mitigation	Post-mitigation
Nature of Impact	-1	-1	Magnitude of Impact	3	2
Extent of Impact	3	2	Reversibility of Impact	2	2
Duration of Impact	4	4	Probability	4	3
Environmental Risk (Pre-mitigation)					-3.00
Mitigation Measures					
<ul style="list-style-type: none"><li>In assessing the mitigated impact, it is assumed that the slopes of the TSF are vegetated, and a control efficiency of 60% is achieved through secondary rehabilitation (NPI, 2012).</li></ul>					
Environmental Risk (Post-mitigation)					-2.5
Degree of confidence in impact prediction:					Medium
Impact Prioritisation					
Public Response					2
Issue has received a meaningful and justifiable public response					
Cumulative Impacts					1
Considering the potential incremental, interactive, sequential, and synergistic cumulative impacts, it is unlikely that the impact will result in spatial and temporal cumulative change.					
Degree of potential irreplaceable loss of resources					1
The impact is unlikely to result in irreplaceable loss of resources.					
Prioritisation Factor					1.17
Final Significance					-9.0

**Table 7: Significance rating for potential air quality impacts due to the operational phase**

Impact Name	Increase in air quality impacts due to recommencement of deposition on Mponeng Lower Compartment TSF				
Alternative	NA				
Phase	Operational Future				
Environmental Risk					
Attribute	Pre-mitigation	Post-mitigation	Attribute	Pre-mitigation	Post-mitigation
Nature of Impact	-1	-1	Magnitude of Impact	3	2
Extent of Impact	3	2	Reversibility of Impact	2	2
Duration of Impact	4	4	Probability	4	3
Environmental Risk (Pre-mitigation)					-3.00
Mitigation Measures					
<ul style="list-style-type: none"><li>• In assessing the mitigated impact, it is assumed that the slopes of the TSF will be vegetated, and a control efficiency of 40% can be achieved (NPI, 2012).</li><li>• It is assumed that the deposition process will be wet (slurry).</li></ul>					
Environmental Risk (Post-mitigation)					-2.50
Degree of confidence in impact prediction:					Medium
Impact Prioritisation					
Public Response					2
Issue has received a meaningful and justifiable public response					
Cumulative Impacts					1
Considering the potential incremental, interactive, sequential, and synergistic cumulative impacts, it is unlikely that the impact will result in significant spatial and temporal cumulative change.					
Degree of potential irreplaceable loss of resources					1
The impact is unlikely to result in irreplaceable loss of resources.					
Prioritisation Factor					1.17
Final Significance					-9.00



## 5 MAIN FINDINGS AND WAY FORWARD

A baseline assessment, as part of the EIA process, was done for the proposed Redeposition on Harmony Mponeng Lower Compartment TSF. The main objective of this study was to establish the current air quality levels at Mponeng Mine and determine whether there may be significance air quality impacts associated with the proposed project. This section summarises the main findings and to provide the method that will be followed for the impact assessment phase.

### 5.1 Main Findings

The main findings of the receiving environment assessment are:

- AQSRs near the Mponeng operations include Elandsfontein and Wedela Community.
- The main sources associated with the Savuka and Mponeng operations likely to contribute to baseline PM emissions include mining and reclaiming operations, processing operations, vehicle entrained dust from roads, vehicle exhaust and windblown dust from exposed areas on existing TSFs.
- Other sources of PM within the area include other companies mining, transport and processing activities, farm activities, occasional biomass burning, household fuel burning in the residential areas, vehicle entrained dust from public roads and vehicle exhaust.
- The wind field is dominated by winds from the northerly sector with the strongest winds (>6 m/s) mostly from the north-northeasterly sector. The predominant northerly wind field remains similar throughout the seasons.
- Dust fallout results from the five (5) DMUs at Mponeng for the period January 2023 to July 2025 show compliance with the NDCR at both the residential and non-residential sites.

### 5.2 Way Forward

The main objective of the investigation is to quantify the potential impacts resulting due the project construction and operational activities on the surrounding environment and human health.

To achieve this, the following tasks will be conducted as part of the impact assessment phase:

- Quantification of air emissions from the project;
- Discussion of meteorological parameters required to establish the atmospheric dispersion potential;
- Calculation of the air concentrations from the project using a suitable atmospheric dispersion model; and,
- Assessment of the significance of the impact through the comparison of simulated air concentrations with local National Ambient Air Quality Standards (NAAQS) (for compliance) and dustfall rates with the National Dust Control Regulations (NDCR).

#### 5.2.1 Emissions Inventory

The establishment of a comprehensive emission inventory will form the basis for the assessment of the air quality impacts from the project operations. The proposed Project operations will result in windblown particulate emissions.

Fugitive emissions refer to emissions that are spatially distributed over a wide area. In the quantification of fugitive dust, use was made of emission factors which associate the quantity of a pollutant to the activity associated with the release of that pollutant.

## 5.2.2 Atmospheric Dispersion Modelling

### 5.2.2.1 Dispersion model selection

Dispersion models compute ambient pollutant concentrations as a function of source configurations, emission strengths and meteorological characteristics, thus providing a useful tool to ascertain the spatial and temporal patterns in the ground level concentrations arising from the emissions from various sources. Increasing reliance has been placed on concentration estimates from models as the primary basis for environmental and health impact assessments, risk assessments and emission control requirements.

The US Environmental Protection Agency's (US EPA) approved regulatory model – AERMOD – was selected for this study. It is one of the models recommended for Level 2 assessments, for near-source (less than 50 km from source) applications in all terrain types, in the South African Regulations Regarding Air Dispersion Modelling (Government Gazette No. 37804, 11 July 2014).

AERMOD is an advanced new-generation model. It is designed to predict pollution concentrations from continuous point, flare, area, line, and volume sources. AERMOD offers new and potentially improved algorithms for plume rise and buoyancy, and the computation of vertical profiles of wind, turbulence and temperature however retains the single straight-line trajectory limitation. AERMET is a meteorological pre-processor for AERMOD. Input data can come from hourly cloud cover observations, surface meteorological observations and twice-a-day upper air soundings. Output includes surface meteorological observations and parameters and vertical profiles of several atmospheric parameters. AERMAP is a terrain pre-processor designed to simplify and standardise the input of terrain data for AERMOD. Input data includes receptor terrain elevation data. The terrain data may be in the form of digital terrain data. The output includes, for each receptor, location, and height scale, which are elevations used for the computation of air flow around hills.

A disadvantage of the model is that spatial varying wind fields, due to topography or other factors cannot be included. Input data types required for the AERMOD model include: source data, meteorological data (supplied in the required format with the WRF data), terrain data, information on the nature of the receptor grid and pre-development or background pollutant concentrations or dustfall rates.

### 5.2.2.2 Meteorological Data Requirements

AERMOD requires two specific input files generated by the AERMET pre-processor. AERMET is designed to be run as a three-stage processor and operates on three types of data (upper air data, on-site measurements, and the national meteorological database). Use will be made of simulated WRF data for the period 2022 to 2024.

### 5.2.2.3 Source Data Requirements

The AERMOD model can model point, area, volume and line sources. The windblown dust from the TSFs and Marginal Ore Dumps (MODs) as will be modelled as area sources, with the vents and stacks modelled as point sources. Version 11.0.0.10 of AERMOD and its pre-processors will be used in the study, with the US EPA 22112 AERMOD executable.

### 5.2.2.4 Modelling Domain

The dispersion of pollutants will be modelled for an area covering 20 km (east-west) by 20 km (north-south) for the project site. The modelling domain will be selected on the basis of the sources of emissions and potential impact areas. This area was divided into a grid with a resolution of 200 m (east-west) by 200 m (north-south). AERMOD simulates ground-level concentrations for each of the receptor grid points. The receptors were modelled at 1.5 m above ground.

#### 5.2.2.5 *Topographical and Land Use Data*

The readily available terrain and land use data will be obtained from the United States Geological Survey (USGS) via the Earth Explorer website (U.S. Department of the Interior, U.S. Geological Survey, 2025). Use will be made of Shuttle Radar Topography Mission (SRTM) (30 m, 1 arc-sec) data and Global Land Cover Characterisation (GLCC) data for Africa.

#### 5.2.2.6 *Dispersion results*

The dispersion model uses the specific input data to run various algorithms to estimate the dispersion of pollutants between the source and receptor. The model output is in the form of a simulated time-averaged concentration at the receptor. These simulated concentrations will be compared against the relevant ambient air quality standards. The post-processing of air concentrations at discrete receptors as well as the regular grid points includes the calculation of various percentiles, specifically the 99<sup>th</sup> percentile, which corresponds to the requirements of the NAAQS.

Ground level concentration (GLC) isopleth plots will be presented to depict interpolated values from the concentrations simulated by AERMOD for each of the receptor grid points specified. Plots reflecting daily averaging periods contain only the 99<sup>th</sup> percentile of simulated ground level concentrations, for those averaging periods, over the entire period for which simulations were undertaken. It is therefore possible that even though a high daily average concentration is simulated at certain locations, this may only be true for one day during the period. Typically, NAAQS apply to areas where the Occupational Health and Safety regulations do not apply, thus outside the operational areas boundaries (fences). Ambient air quality guidelines and standards are therefore not occupational health indicators but applicable to areas where the public has access.

#### 5.2.3 *Uncertainty of Modelled Results*

The main steps of uncertainty management are to:

- identify and understand uncertainties;
- understand whether uncertainties matter for decisions being made at the time;
- if they do matter, decide what to do about them; and,
- recommend a way forward.

Managing uncertainties attempts to eliminate the source of technical disagreements and failure to understand them often leads to a conclusion that all uncertainties need to be eliminated before project decisions can be made. The first decision about how to manage uncertainties relates to their significance given the decision being addressed. In the current context, the different parts of the investigation were grouped into similar uncertainty regimes, namely:

- dispersion model uncertainties;
- input data uncertainties;
- the methodology of validating model results; and,
- the methodology of expressing the modelled scenarios.

Modelled results are considered valid when they fall within the generally accepted (US EPA, 2005) “factor of two” accuracy of dispersion models. In quantifying the uncertainty of the modelled results for this assessment, measured ambient data was required which was not available for this study.

#### 5.2.4 *Impact Assessment Report*

An air quality impact assessment report, including the methodology, analysis, results and proposed recommendations, will be submitted in support of the EIA being conducted.

## 6 REFERENCES

- Burger, L. W. (2010). Complexities in the Estimation of Emissions and Impacts of Wind generated fugitive dust. *Proceedings of the National Association for Clean Air Conference*. Polokwane: NACA.
- Burger, L., Held, G. S., & Snow, N. H. (1997). *Revised User's Manual for the Airborne Dust Dispersion Model from Area Sources (ADDAS)*. Eskom TSI Report No. TRR/T97?066.
- CERC. (2004). *ADMS Urban Training. Version 2. Unit A*.
- Colls, J. (2002). *Air Pollution* (Second ed.). London: Taylor & Francis Group.
- Farmer, A. M. (1993). The Effects of Dust on Vegetation – A Review. *Environmental Pollution*, 79, 63-75.
- Liebenberg-Enslin, H. (2014). *A Functional Dependence Analysis of Wind Erosion Modelling System Parameters to Determine a Practical Approach for Wind Erosion Assessments*. Johannesburg: Faculty of Science, University of Johannesburg.
- NPI. (2012). *National Pollutant Inventory Emission Estimation Technique Manual for Mining. Version 3.1*. Australian Government: Department of Sustainability, Environment, Water, Population and Communities.
- Shackleton, N., & Petzer, G. (2020). *Baseline Air Quality Specialist Report for the AngloGold Ashanti West Wits Operations. Draft Report*. Johannesburg: AngloGold Ashanti Limited.
- Tiwary, A., & Colls, J. (2010). *Air pollution: measurement, monitoring and mitigation* (3rd Edition ed.). Oxon: Routledge.
- US EPA. (2005). Revision to the Guideline on Air Quality Models: Adoption of a Preferred General Purpose (Flat and Complex Terrain) Dispersion Model and Other Revisions; Final Rule. *Federal Register no. 68218 / Vol. 70, No. 216 / Wednesday, November 9, 2005 / Rules and Regulations*. Washington: United States Environmental Protection Agency.

## 7 APPENDIX A: SPECIALIST CURRICULUM VITAE

### ABBREVIATED CURRICULUM VITAE

HANLIE LIEBENBERG-ENSLIN

#### **FULL CURRICULUM VITAE**

<b>Name of Firm</b>	Airshed Planning Professionals (Pty) Ltd
<b>Name of Staff</b>	Hanlie Liebenberg-Enslin
<b>Profession</b>	Managing Director / Air Quality Scientist
<b>Date of Birth</b>	09 January 1971
<b>Years with Firm/ entity</b>	25 years
<b>Nationalities</b>	South African

#### MEMBERSHIP OF PROFESSIONAL SOCIETIES

- International Union of Air Pollution Prevention and Environmental Protection Associations (IUAPPA) – President 2010–2013, Board member 2013-present
- Member of the National Association for Clean Air (NACA) - President 2008-2010, NACA Council member 2010 –2014

#### KEY QUALIFICATIONS

Hanlie Liebenberg-Enslin started her professional career in Air Quality Management in 2000 when she joined Environmental Management Services (EMS) after completing her master's degree at the University of Johannesburg (then Rand Afrikaans University) in the same field. She is one of the founding members of Airshed Planning Professionals in 2003 where she has worked as a company Director until May 2013 when she was appointed as Managing Director. She has extensive experience on the various components of air quality management including emissions quantification for a range of source types, simulations using a range of dispersion models, impacts assessment and health risk screening assessments. She has worked all over Africa and has an inclusive knowledge base of international legislation and requirements pertaining to air quality.

She has developed technical and specialist skills in various modelling packages including the industrial source complex models (ISCST3 and SCREEN3), EPA Regulatory Models (AERMOD and AERMET), UK Gaussian plume model (ADMS), EPA Regulatory puff-based model (CALPUFF and CALMET), puff-based HAWK model and line-based models such as CALINE. Her experience with emission models includes Tanks 4.0 (for the quantification of tank emissions) and GasSim (for the quantification of landfill emissions).

Having worked on projects throughout Africa (i.e. South Africa, Mozambique, Botswana, Namibia, Malawi, Kenya, Mali, Democratic Republic of Congo, Tanzania, Madagascar, Guinea and Mauritania) Hanlie has developed a broad experience base. She has a good understanding of the laws and regulations associated with ambient air quality and emission limits in South Africa and various other African countries, as well as the World Bank Guidelines, European Community Limits and World Health Organisation.

Being an avid student, she received her PhD from the University of Johannesburg in 2014, specialising in Aeolian dust transport. Hanlie is also actively involved in the National Association for Clean Air and is their representative at the International Union of Air Pollution Prevention and Environmental Protection Associations.

## RELEVANT EXPERIENCE

---

### Air Quality Management Plans and Strategies

Vaal Triangle Airshed Priority Area Draft Second Generation Air Quality Management Plan (AQMP)(Aug 2017 – Jun 2020); Advanced Air Quality Management for the Strategic Environmental Management Plan for the Uranium and Other Industries in the Erongo Region (May 2016 – Feb 2019); City of Johannesburg AQMP (2016-2019); Air Quality Monitoring and Management for the Al Madinah Al Munawarah Development Authority (MDA) in Saudi Arabia (2016-2017). Provincial Air Quality Management Plan for the Limpopo Province (March 2013); Mauritius Road Development Agency Proposed Road Decongestion Programme (July 2013); Transport Air Quality Management Plan for the Gauteng Province (February 2012); Gauteng Green Strategy (2011); Air Quality and Radiation Assessment for the Erongo Region Namibia as part of a Strategic Environmental Assessment (June, 2010); Vaal Triangle Airshed Priority Area AQMP (March, 2009); Gauteng Provincial AQMP (January 2009); North West Province AQMP (2008); City of Tshwane AQMP (April 2006); North West Environment Outlook 2008 (December 2007); Ambient Monitoring Network for the North West Province (February 2007); Spatial Development Framework Review for the City of uMhlathuze (August 2006); Ambient Particulate Pollution Management System (Anglo Platinum Rustenburg).

Hanlie has also been the Project Director on all the listed Air Quality Management plan developments.

### Mining and Ore Handling

Hanlie has undertaken numerous air quality impact assessments and management plans for coal, platinum, uranium, copper, cobalt, chromium, fluorspar, bauxite and mineral sands mines. These include air quality impact assessments for: Namibia – Husab Uranium Mine, Trekkopje Uranium Mine; Bannerman Uranium Project; Langer Heinrich Uranium Mine, Valencia Uranium Mine, Rössing Uranium Mine; and B2Gold Otjikoto Gold Mine. South Africa – Sishen Iron Ore Mine; Tshipi Borwa Manganese Mine; Mamatwan Manganese Mine; Kolomela Iron Ore Mine; Thabazimbi Iron ore Mine; UKM Manganese Mine; Everest Platinum Mine; Impala Platinum Mine; Anglo Platinum Mines; Abglo Gold Ashanti MWS, Vaal River and West Wits complexes, Harmony Gold, Glencore Coal Mines, South32 and Anglo Coal; Tselentis Coal mine (Breyeton); Lime Quarries (De Hoek, Dwaalboom, Slurry); Beesting Colliery (Ogies); Anglo Coal Opencast Coal Mine (Heidelberg); Klippan Colliery (Belfast); Beesting Colliery (Ogies); Xstrata Coal Tweefontein Mine (Witbank); Xstrata Coal Spitskop Mine (Hendrina); Middelburg Colliery (Middelburg); Klipspruit Project (Ogies); Rustenburg Platinum Mine (Rustenburg); Impala Platinum (Rustenburg); Buffelsfontein Gold Mine (Stilfontein); Kroondal Platinum Mine (Kroondal); Lonmin Platinum Mine (Mooi-nooi); Rhovan Vanadium (Brits); Macaullei Colliery (Vereeniging); Voorspoed Gold Mine (Kroonstad); Pilanesberg Platinum Mine (Pilanesberg); Kao Diamond Mine (Lesotho); Modder East Gold Mine (Brakpan); Modderfontein Mines (Brakpan); Zimbiwa Crusher Plant (Brakpan); RBM Zulti South Titanium mining (Richards Bay); Premier Diamond Mine (Cullinan). Botswana – Jwaneng Diamond Mine and Debswana Mining Company. Zimbabwe – Murowa Diamond Mine. Other mining projects include Sadiola Gold Mine (Mali); North Mara Gold Mine (Tanzania); Bulyanhulu North Mara Gold Mine (Tanzania).

### Metal Recovery

Air quality impact assessments have been carried out for Smelterco Operations (Kitwe, Zambia); Waterval Smelter (Amplats, Rustenburg); Hercul Ferrochrome Smelter (Brits); Rhovan Ferrovanadium (Brits); Impala Platinum (Rustenburg); Impala Platinum (Springs); Transvaal Ferrochrome (now IFM, Mooi-nooi), Lonmin Platinum (Mooi-nooi); Xstrata Ferrochrome Project Lion (Steelpoort); ArcelorMittal South Africa (Vandebijlpark, Vereeniging, Pretoria, Newcastle, Saldanha); Hexavalent Chrome Xstrata (Rustenburg); Portland Cement Plant (DeHoek, Slurry, Dwaalboom, Hercules, Port Elizabeth); Vantech Plant (Steelpoort); Bulyanhulu Gold Smelter (Tanzania), Sadiola Gold Recovery Plant (Mali); RBM Smelter Complex (Richards Bay);

Chibuto Heavy Minerals Smelter (Mozambique); Moma Heavy Minerals Smelter (Mozambique); Boguchansky Aluminium Plant (Russia); Xstrata Chrome CMI Plant (Lydenburg); SCAW Metals (Germiston).

### **Chemical Industry**

Comprehensive air quality impact assessments have been completed for AECI (Pty) Ltd Operations (Modderfontein); Kynoch Fertilizer (Potchefstroom), Foskor (Richards Bay) and Omnia (Rustenburg).

### **Petrochemical Industry**

Numerous air quality impact assessments have been completed for SASOL operations (Sasolburg); Sapref Refinery (Durban); Health risk assessment of Island View Tank Farm (Durban Harbour).

### **Pulp and Paper Industry**

Air quality studies have been undertaken on the expansion of Mondi Richards Bay, Multi-Boiler Project for Mondi Merebank (Durban), impact assessments for Sappi Stanger, Sappi Enstra (Springs), Sappi Ngodwana (Nelspruit) and Pulp United (Richards Bay).

### **Power Generation**

Air quality impact assessments have been completed for numerous Eskom coal fired power station studies including the Coal 3 Power Project near Lephalale, Komati Power Station and Lethabo Power Stations. In addition to Eskom's coal fired power stations, projects have been completed for the proposed Mmamabula Energy Project (Botswana); Morupule Power Plant (Botswana), NamPower Erongo Power Project (Namibia), NamPower Van Eck Power Station (Namibia) and NamPower Biomass Power Plant (Namibia).

Apart from Eskom projects, heavy fuel oil power station assessments have also been completed in Kenya (Rabai Power Station) and Namibia (Arandis Power Plant).

Green energy projects included several Solar Photovoltaic Projects (Mulilo and Enertrag South Africa (Pty) Ltd) and assessing potential particulate matter impacts from Wind Farms near the South African Large Telescope (SALT).

### **Waste Disposal**

Air quality impact assessments, including odour and carcinogenic and non-carcinogenic pollutants were undertaken for the proposed Coega Waste Disposal Facility (Port Elizabeth); Boitshepi Waste Disposal Site (Vanderbijlpark); Umdloti Waste Water Treatment Plant (Durban).

### **Cement Manufacturing**

Impact assessments for ambient air quality have been completed for the PPC Cement Alternative Fuels Project (which included the assessment of the cement manufacturing plants in the North West Province, Gauteng and Western).

### **Vehicle emissions**

Transport Air quality Management Plan for the Gauteng Department of Roads and Transport (Feb 2012); Platinum Highway (N1 to Zeerust); Gauteng Development Zone (Johannesburg); Gauteng Department of Roads and Transport (Transport Air Quality Management Plan); Mauritius Road Development Agency (Proposed Road Decongestion Programme); South African Petroleum Industry Association (Impact Urban Air Quality).



## Government and International Strategy Projects

Hanlie is one of the Lead Authors of Section 1.1: Africa's Development: Challenges, Drivers and key objectives, of the United Nations Environment Programme (UNEP), Climate and Clean Air Coalition (CCAC) and Stockholm Environment Institute (SEI) coordinated 'Integrated Assessment of Air Pollution and Climate Change for Africa Report. She was also the Terminal Reviewer of the UNEP/UNDA project "Air quality data for health and environment policies in Africa and the Asia-Pacific region" (May 2020). Hanlie was also the project Director on the APPA Registration Certificate Review Project for Department of Environmental Affairs (DEA); Green Strategy for Gauteng (2011).

## EDUCATION

---

<b>Ph.D Geography</b>	<b>Ph.D Geography</b> , University of Johannesburg, RSA (2014) Title: <i>A functional dependence analysis of wind erosion modelling system parameters to determine a practical approach for wind erosion assessments</i>
<b>M.Sc Geography and Environmental Management</b>	University of Johannesburg, RSA (1999) Title: <i>Air Pollution Population Exposure Evaluation in the Vaal Triangle using GIS</i>
<b>B.Sc Hons. Geography</b>	University of Johannesburg, RSA (1995) GIS & Environmental Management
<b>B.Sc Geography and Geology</b>	University of Johannesburg, RSA (1994) Geography and Geology

## ADDITIONAL COURSES AND ACADEMIC REVIEWS

---

<b>External Examiner (July 2025)</b>	PhD Candidate: TJB van Niekerk Spatial planning solutions to mitigate poor air quality in South African dense, low-income areas Department Geography and Environmental Management, North-West University
<b>External Examiner (January 2022)</b>	MSc Candidate: P Chidhindi Using dispersion models as a regulatory tool in South Africa Department Geography and Environmental Management, North-West University
<b>External Examiner (February 2021)</b>	PhD Candidate: Ms NM Walton Aerosol source apportionment in southern Africa Faculty of Natural and Agricultural Sciences, North-West University
<b>External Examiner (May 2018)</b>	MSc Candidate: Ms A Quta Characterisation of Particulate Matter and Some Pollutant Gases in the City of Tshwane Department of Environmental Sciences, University of South Africa



<b>External Examiner (December 2017)</b>	MSc Candidate: Ms B Wernecke Ambient and Indoor Particulate Matter Concentrations on the Mpumalanga Highveld Faculty of Natural and Agricultural Sciences, North-West University
<b>External Examiner (January 2016)</b>	MSc Candidate: Ms M Grobler Evaluating the costs and benefits associated with the reduction in SO <sub>2</sub> emissions from Industrial activities on the Highveld of South Africa Department of Chemical Engineering, University of Pretoria
<b>External Examiner (August 2014)</b>	MSc Candidate: Ms Seneca Naidoo Quantification of emissions generated from domestic fuel burning activities from townships in Johannesburg Faculty of Science, University of the Witwatersrand
<b>Air Quality Law– Lecturer (2012 - 2016)</b>	Environmental Law course: Centre of Environmental Management.
<b>Air Quality law for Mining – Lecturer (2014)</b>	Environmental Law course: Centre of Environmental Management.
<b>Air Quality Management – Lecturer (2006 -2012)</b>	Air Quality Management Short Course: NACA and University of Johannesburg, University of Pretoria and University of the North West
<b>ESRI SA (1999)</b>	ARCINFO course at GIMS: Introduction to ARCINFO 7 course
<b>ESRI SA (1998)</b>	ARCVIEW course at GIMS: Advanced ARCVIEW 3.1 course

## COUNTRIES OF WORK EXPERIENCE

---

South Africa, Mozambique, Botswana, Namibia, Malawi, Mauritius, Kenya, Mali, Zimbabwe, Democratic Republic of Congo, Tanzania, Zambia, Madagascar, Guinea, Russia, Mauritania, Morocco, and Saudi Arabia.

## EMPLOYMENT RECORD

---

### March 2003 - Present

**Airshed Planning Professionals (Pty) Ltd**, Managing Director and Principal Air Quality Scientist, Midrand, South Africa.

### January 2000 – February 2003

**Environmental Management Services CC**, Senior Air Quality Scientist.

### May 1998 – December 1999

**Independent Broadcasting Authority (IBA)**, GIS Analyst and Demographer.

February 1997 – April 1998

GIS Business Solutions (PQ Africa), GIS Analyst

January 1996 – December 1996

Annegarn Environmental Research (AER), Student Researcher

## LANGUAGES

---

	Speak	Read	Write
English	Excellent	Excellent	Excellent
Afrikaans	Excellent	Excellent	Excellent

## CONFERENCE AND WORKSHOP PRESENTATIONS AND PAPERS

---

- Air Quality Evolution in South Africa over the past 20 years: A Consultants' Journey. Hanlie Liebenberg-Enslin. 55<sup>th</sup> Annual Conference of the National Association for Clean Air, 4 to 6 September 2024, Johannesburg. Keynote speaker.
- Integrated Assessment of Air Pollution and Climate Change for Sustainable Development in Africa – Towards “the Africa we want”. Hanlie Liebenberg-Enslin, and Kevin Hicks. Air Protection 2023 & International Conference and 13th Croatian Scientific and Professional Meeting, CAPPA, 20 - 24 September 2023, Dubrovnik, Croatia at Hotel Astarea, Mlini.
- Dust and radon levels on the west coast of Namibia – What did we learn? Hanlie Liebenberg-Enslin, Detlof von Oertzen, and Norwel Mwananawa. Atmospheric Pollution Research, 2020. <https://doi.org/10.17159/caj/2020/30/1.8467>
- Understanding the Atmospheric Circulations that lead to high particulate matter concentrations on the west coast of Namibia. Hanlie Liebenberg-Enslin, Hannes Rauntenbach, René von Gruenewaldt, and Lucian Burger. Clean Air Journal, 27, 2, 2017, 66-74.
- Cooperation on Air Pollution in Southern Africa: Issues and Opportunities. SLCPs: Regional Actions on Climate and Air Pollution. Liebenberg-Enslin, H. 17<sup>th</sup> IUAPPA World Clean Air Congress and 9<sup>th</sup> CAA Better Air Quality Conference. Clean Air for Cities - Perspectives and Solutions. 29 August - 2 September 2016, Busan Exhibition and Convention Center, Busan, South Korea.
- A Best Practice prescription for quantifying wind-blown dust emissions from Gold Mine Tailings Storage Facilities. Liebenberg-Enslin, H., Annegarn, H.J., and Burger, L.W. VIII International Conference on Aeolian Research, Lanzhou, China. 21-25 July 2014.
- Quantifying and modelling wind-blown dust emissions from gold mine tailings storage facilities. Liebenberg-Enslin, H. and Annegarn, H.J. 9<sup>th</sup> International Conference on Mine Closure, Sandton Convention Centre, 1-3 October 2014.
- Gauteng Transport Air Quality Management Plan. Liebenberg-Enslin, H., Krause, N., Burger, L.W., Fitton, J. and Modisamongwe, D. National Association for Clean Air Annual Conference, Rustenburg. 31 October to 2 November 2012. Peer reviewed.

- Developing an Air Quality Management Plan: Lessons from Limpopo. Bird, T.; Liebenberg-Enslin, H., von Gruenewaldt, R., Modisamongwe, D. National Association for Clean Air Annual Conference, Rustenburg. 31 October to 2 November 2012. Peer reviewed.
- Modelling of wind eroded dust transport in the Erongo Region, Namibia, H. Liebenberg-Enslin, N Krause and H.J. Annegarn. National Association for Clean Air (NACA) Conference, October 2010. Polokwane.
- The lack of inter-discipline integration into the EIA process-defining environmental specialist synergies. H. Liebenberg-Enslin and LW Burger. IAIA SA Annual Conference, 21-25 August 2010. Workshop Presentation. Not Peer Reviewed.
- A Critical Evaluation of Air Quality Management in South Africa, H Liebenberg-Enslin. National Association for Clean Air (NACA) IUAPPA Conference, 1-3 October 2008. Nelspuit.
- Vaal Triangle Priority Area Air Quality Management Plan – Baseline Characterisation, R.G. Thomas, H Liebenberg-Enslin, N Walton and M van Nierop. National Association for Clean Air (NACA) conference, October 2007, Vanderbijl Park.
- Air Quality Management plan as a tool to inform spatial development frameworks – City of uMhlathuze, Richards Bay, H Liebenberg-Enslin and T Jordan. National Association for Clean Air (NACA) conference, 29 – 30 September 2005, Cape Town.

## CERTIFICATION

---

I, the undersigned, certify that to the best of my knowledge and belief, these data correctly describe me, my qualifications, and my experience.



Full name of staff member:

21 August 2025

Hanlie Liebenberg-Enslin

## 8 APPENDIX B – IMPACT SIGNIFICANCE RATING METHODOLOGY

The impact assessment methodology is guided by the requirements of the NEMA EIA Regulations (2010). The broad approach to the significance rating methodology is to determine the environmental risk (ER) by considering the consequence (C) of each impact (comprising Nature, Extent, Duration, Magnitude, and Reversibility) and relate this to the probability/likelihood (P) of the impact occurring. This determines the environmental risk. In addition, other factors, including cumulative impacts, public concern, and potential for irreplaceable loss of resources, are used to determine a prioritisation factor (PF) which is applied to the ER to determine the overall significance (S).

### Determination of Environmental Risk:

The significance (S) of an impact is determined by applying a prioritisation factor (PF) to the environmental risk (ER). The environmental risk is dependent on the consequence (C) of the particular impact and the probability (P) of the impact occurring. Consequence is determined through the consideration of the Nature (N), Extent (E), Duration (D), Magnitude (M), and reversibility (R) applicable to the specific impact.

For the purpose of this methodology the consequence of the impact is represented by:

$$C = \frac{(E+D+M+R)}{4} \times N$$

Each individual aspect in the determination of the consequence is represented by a rating scale as defined in Table 8.

**Table 8: Criteria for determining impact consequence**

Aspect	Score	Definition
Nature	- 1	Likely to result in a negative/ detrimental impact
	+1	Likely to result in a positive/ beneficial impact
Extent	1	Activity (i.e. limited to the area applicable to the specific activity)
	2	Site (i.e. within the development property boundary),
	3	Local (i.e. the area within 5 km of the site),
	4	Regional (i.e. extends between 5 and 50 km from the site)
	5	Provincial / National (i.e. extends beyond 50 km from the site)
Duration	1	Immediate (<1 year)
	2	Short term (1-5 years),
	3	Medium term (6-15 years),
	4	Long term (the impact will cease after the operational life span of the project),
	5	Permanent (no mitigation measure of natural process will reduce the impact after construction).
Magnitude/ Intensity	1	Minor (where the impact affects the environment in such a way that natural, cultural and social functions and processes are not affected),
	2	Low (where the impact affects the environment in such a way that natural, cultural and social functions and processes are slightly affected),
	3	Moderate (where the affected environment is altered but natural, cultural and social functions and processes continue albeit in a modified way),

Aspect	Score	Definition
	4	High (where natural, cultural or social functions or processes are altered to the extent that it will temporarily cease), or
	5	Very high / don't know (where natural, cultural or social functions or processes are altered to the extent that it will permanently cease).
Reversibility	1	Impact is reversible without any time and cost.
	2	Impact is reversible without incurring significant time and cost.
	3	Impact is reversible only by incurring significant time and cost.
	4	Impact is reversible only by incurring prohibitively high time and cost.
	5	Irreversible Impact

Once the C has been determined the ER is determined in accordance with the standard risk assessment relationship by multiplying the C and the P (Table 10). Probability is rated/scored as per Table 9.

**Table 9: Probability scoring**

Probability	1	Improbable (the possibility of the impact materialising is very low as a result of design, historic experience, or implementation of adequate corrective actions; <25%),
	2	Low probability (there is a possibility that the impact will occur; >25% and <50%),
	3	Medium probability (the impact may occur; >50% and <75%),
	4	High probability (it is most likely that the impact will occur - > 75% probability), or
	5	Definite (the impact will occur)

The result is a qualitative representation of relative ER associated with the impact. ER is therefore calculated as follows:

$$ER = C \times P$$

**Table 10: Determination of environmental risk**

Consequence	5	5	10	15	20	25
	4	4	8	12	16	20
	3	3	6	9	12	15
	2	2	4	6	8	10
	1	1	2	3	4	5
		1	2	3	4	5
	Probability					

The outcome of the environmental risk assessment will result in a range of scores, ranging from 1 through to 25. These ER scores are then grouped into respective classes as described in Table 11.

**Table 11: Significance classes**

Environmental Risk Score	
Value	Description
< 9	Low (i.e. where this impact is unlikely to be a significant environmental risk),
≥9; <17	Medium (i.e. where the impact could have a significant environmental risk),

≥ 17	High (i.e. where the impact will have a significant environmental risk).
------	--

The impact ER will be determined for each impact without relevant management and mitigation measures (pre-mitigation), as well as post implementation of relevant management and mitigation measures (post-mitigation). This allows for a prediction in the degree to which the impact can be managed/mitigated.

#### Impact Prioritisation:

In accordance with the requirements of Regulation 31 (2)(l) of the EIA Regulations (GNR 543), and further to the assessment criteria presented in the Section above it is necessary to assess each potentially significant impact in terms of:

- Cumulative impacts; and
- The degree to which the impact may cause irreplaceable loss of resources.

In addition, it is important that the public opinion and sentiment regarding a prospective development and consequent potential impacts is considered in the decision-making process.

In an effort to ensure that these factors are considered, an impact prioritisation factor (PF) will be applied to each impact ER (post-mitigation). This prioritisation factor does not aim to detract from the risk ratings but rather to focus the attention of the decision-making authority on the higher priority/significance issues and impacts. The PF will be applied to the ER score based on the assumption that relevant suggested management/mitigation impacts are implemented.

**Table 12: Criteria for determining prioritisation**

<b>Public response (PR)</b>	Low (1)	Issue not raised in public response.
	Medium (2)	Issue has received a meaningful and justifiable public response.
	High (3)	Issue has received an intense meaningful and justifiable public response.
<b>Cumulative Impact (CI)</b>	Low (1)	Considering the potential incremental, interactive, sequential, and synergistic cumulative impacts, it is unlikely that the impact will result in spatial and temporal cumulative change.
	Medium (2)	Considering the potential incremental, interactive, sequential, and synergistic cumulative impacts, it is probable that the impact will result in spatial and temporal cumulative change.
	High (3)	Considering the potential incremental, interactive, sequential, and synergistic cumulative impacts, it is highly probable/definite that the impact will result in spatial and temporal cumulative change.
<b>Irreplaceable loss of resources (LR)</b>	Low (1)	Where the impact is unlikely to result in irreplaceable loss of resources.
	Medium (2)	Where the impact may result in the irreplaceable loss (cannot be replaced or substituted) of resources but the value (services and/or functions) of these resources is limited.
	High (3)	Where the impact may result in the irreplaceable loss of resources of high value (services and/or functions).

The value for the final impact priority is represented as a single consolidated priority, determined as the sum of each individual criteria represented in Table 12. The impact priority is therefore determined as follows:

$$\text{Priority} = \text{PR} + \text{CI} + \text{LR}$$

The result is a priority score which ranges from 3 to 9 and a consequent PF ranging from 1 to 2 (refer to Table 13).

**Table 13: Determination of prioritisation factor**

Priority	Ranking	Prioritisation Factor
3	Low	1
4	Medium	1.17
5	Medium	1.33
6	Medium	1.5
7	Medium	1.67
8	Medium	1.83
9	High	2

In order to determine the final impact significance the PF is multiplied by the ER of the post mitigation scoring (Table 14). The ultimate aim of the PF is to be able to increase the post mitigation environmental risk rating by a full ranking class, if all the priority attributes are high (i.e. if an impact comes out with a medium environmental risk after the conventional impact rating, but there is significant cumulative impact potential, significant public response, and significant potential for irreplaceable loss of resources, then the net result would be to upscale the impact to a high significance).

**Table 14: Final environmental significance rating**

Environmental Significance Rating	
Value	Description
< 10	Low (i.e. where this impact would not have a direct influence on the decision to develop in the area),
≥10 <20	Medium (i.e. where the impact could influence the decision to develop in the area),
≥ 20	High (i.e. where the impact must have an influence on the decision process to develop in the area).